



Big news!

Small size



Equal Click System
Mini Click System



psmlighting
100% Made in Belgium

All information in this catalogue is without engagement.
Psm reserves the right to alter materials, characteristics and dimensions without prior notice.
Read instructions carefully. The general psm sales conditions are always applicable.
Nothing in this catalogue can be reproduced without permission in writing from the psmlighting BV company.



Equal Click System

80 Ø

Ons innovatief Equal Click System garandeert een naadloze overgang van de spot in het plafond. Door deze nieuwe technologie worden alle hoeken in je ruimte subtiel verlicht. In het uitgebreide gamma inbouwcassettes vind je zeker de Equal Click die bij jou en jouw interieur past.

Our innovative Equal Click System guarantees a seamless transition from the spot into the ceiling. This new technology subtly illuminates all corners of your room. In the wide range of build in recessed cassettes you are sure to find the Equal Click that suits you and your interior.



NEW!

Mini Click System

60 Ø

Hetzelfde comfort van de Equal Click in een kleiner formaat. Ook deze mini versie wordt gelijk met het plafond gemonteerd en is verkrijgbaar met verschillende inbouwcassettes. Ontdek het volledige gamma en alle mogelijkheden in deze brochure.

The same comfort of the Equal Click in a smaller size. This mini version is also mounted seamlessly in the ceiling and is available with different built-in cassettes. Discover the full range and all different possibilities in this brochure.





MiniClick System ©

patent pending

Ø60-62




E-MINI-CONCRETE

SEAMLESS




E-MINI-GYPROC

BUILT-IN



E-MINI-ROUNDBASE



E-MINI-SINGLEBASE

EDGE

E27

230V

DIMMABLE



ES50

230V

DIMMABLE



SLO

CRI90
6,1W
350mA
700lm
DIMMABLE



SLE11

CRI95
6,7W
250mA
405lm
DIMMABLE



LAMP

CASSETTE



E-MINIGU10



E-MINIE27



E-MINIFIX



E-MINICURVE



E-MINIYOKO



E-MINIPARA



E-MINICONE



E-MINIZENO



E-MINIREZA



COLOUR 1M



COLOUR 2M



COLOUR 14



COLOUR 45



Groendreef 60 | 9880 Aalter | Belgium | T +32 9 374 19 51 | www.psmighting.be

INDOOR | Ceiling UP | Luminaires | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINI-GYPROC/.. - Ø60-62 MINI CLICK SYSTEM

IP20  0.0900 



built-in ring - round - for ceiling in gyproc

Dimensions

→ Ø60xH55 mm

 Ø60-62 mm

└┘ 70 mm

Ref

E-MINI-GYPROC

Price €

min. thickness gyproc 12mm
installation depth depends on the cassette

E-MINI-CONCRETE/.. - Ø60-62 MINI CLICK SYSTEM

IP20  0.1200 



built-in ring - round - for concrete ceiling

Dimensions

→ Ø60xH55 mm

 Ø60-62 mm

└┘ 70 mm

Ref

E-MINI-CONCRETE

Price €

installation depth depends on the cassette

E-MINIROUNDBASE/.. - Ø60-62 MINI CLICK SYSTEM

IP20  0.1500 



built-in ring - round - with edge

Dimensions

→ Ø70xH55 mm

 Ø60-62 mm

└┘ 70 mm

Materials

Aluminium

1M | 2M | 14

Ref

E-MINIROUNDBASE.1M



E-MINIROUNDBASE.2M



E-MINIROUNDBASE.14



Price €

installation depth depends on the cassette

E-MINISINGLEBASE/.. - Ø60-62 MINI CLICK SYSTEM

IP20  



built-in ring - square - with edge

Dimensions

→ L70xB70xH55 mm

 Ø60-62 mm

└┘ 70 mm

Materials

Aluminium

1M | 2M | 14

Ref

E-MINISINGLEBASE.1M



E-MINISINGLEBASE.2M



E-MINISINGLEBASE.14



Price €

installation depth depends on the cassette

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINICOVER/.. - Ø60-62 MINI CLICK SYSTEM

IP20   0.0500 



built-in cassette - reusable cover

Dimensions

↔ Ø52 mm

Ref

E-MINICOVER


Price €

for finishing with filler or paintwork
42/5000

for finishing with filler or paintwork

E-MINICALIBER/.. - Ø60-62 MINI CLICK SYSTEM

IP20   0.0500 



caliber - reusable caliber for placing ring in concrete or gyproc ceiling

Dimensions

↔ Ø59,8 mm


Ref

E-MINICALIBER

Price €

E-SAWHOLE.D60/.. - Ø60-62 MINI CLICK SYSTEM

IP20   0.3700 



clock drill - hole saw CMT orange tools

Ø60-62

INDOOR | Ceiling UP | Luminaires | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINIFIX/.. - Ø60-62 MINI CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 735lm CRI90 max. 6,2W

350mA

Dimensions

Ø52xH67 mm

77 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-MINIFIX.1M

E-MINIFIX.2M

E-MINIFIX.14

E-MINIFIX.45

Price €

CW | NW | WW

CW | NW | WW


CW | NW | WW

CW | NW | WW

built-in

E-MINICURVE/.. - Ø60-62 MINI CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 735lm CRI90 max. 6,2W

350mA

Dimensions

Ø52xH75 mm

85 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-MINICURVE.1M

E-MINICURVE.2M

E-MINICURVE.14

E-MINICURVE.45

Price €

CW | NW | WW

CW | NW | WW


CW | NW | WW

CW | NW | WW

built-in

E-MINIYOKO/.. - Ø60-62 MINI CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 735lm CRI90 max. 6,2W

350mA

Dimensions

Ø52xH83 mm

93 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-MINIYOKO.1M

E-MINIYOKO.2M

E-MINIYOKO.14

E-MINIYOKO.45

Price €

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

built-in

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINIPARA/.. - Ø60-62 MINI CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 735lm CRI90 max. 6,2W

350mA

Dimensions

Ø59,5xH76 mm

86 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-MINIPARA.1M

E-MINIPARA.2M

E-MINIPARA.14

E-MINIPARA.45

Price €

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

semi built-in/up

E-MINICONE/.. - Ø60-62 MINI CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 735lm CRI90 max. 6,2W

350mA

Dimensions

Ø59,5xH76 mm

86 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-MINICONE.1M

E-MINICONE.2M

E-MINICONE.14

E-MINICONE.45

Price €

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

semi built-in/up




INDOOR | Ceiling UP | Luminaires | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINIE27/.. - Ø60-62 MINI CLICK SYSTEM

~230V



built-in cassette - round - fixed - without LED lamp

Lamptype

1x ST64 E27 max. 8W 230V
OR 1x A60 E27 max. 15W 230V

Dimensions

Ø52xH11,5 mm 70 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref


E-MINIE27.1M
E-MINIE27.2M
E-MINIE27.14
E-MINIE27.45

Price €

built-in

E-MINIGU10/.. - Ø60-62 MINI CLICK SYSTEM

~230V



built-in cassette - round - fixed - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø54xH70 mm 80 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-MINIGU10.1M
E-MINIGU10.2M
E-MINIGU10.14
E-MINIGU10.45

Price €


semi built-in/up



All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-MINIZENO/.. - Ø60-62 MINI CLICK SYSTEM

IP20    0.0400 



built-in cassette for spotlight or pendant - round

Dimensions

↔ Ø52xH11,5 mm ↙ ↘ 55 mm

Materials


Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-MINIZENO.1M	
E-MINIZENO.2M	
E-MINIZENO.14	
E-MINIZENO.45	

built-in

E-MINIREZA/.. - Ø60-62 MINI CLICK SYSTEM

IP20    0.1300 



built-in cassette for spotlight or pendant - round

Dimensions

↔ Ø52xH24 mm ↙ ↘ 55 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-MINIREZA.1M	
E-MINIREZA.2M	
E-MINIREZA.14	
E-MINIREZA.45	

built-in

E-MINIMARIE/.. - Ø60-62 MINI CLICK SYSTEM

IP20   



built-in cassette for spotlight or pendant - round

Dimensions

↔ Ø52xH24 mm ↙ ↘ 55 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-MINIMARIE.1M	
E-MINIMARIE.2M	
E-MINIMARIE.14	
E-MINIMARIE.45	

built-in



Equal


Groendreef 60
9880 Aalter
T +32 9 374 19 51
www.psmlighting.com



psmlighting
100% Made in Belgium





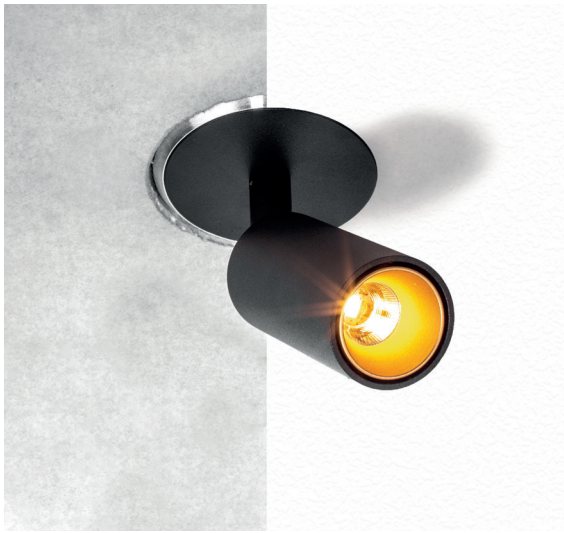

Equal click System[®]

PATENT PENDING

 80-82




E-RING-CONCRETE



E-RING-GYPROC



E-ROUNDBASE



E-SINGLEBASE



E-TUBE.100



E-TUBE.120



E-TUBE.140



E-TUBE.165

ES50

DICRO

AC

DC

SLE16

CTZ

XTM

230V

12V

CRI92
9,5W
230V
700lm

CRI92
12,2W
350mA
1200lm

CRI95
9,7W
350mA
600lm

CRI90
12W
230V
1000lm

CRI80
9,5W
700mA
1300lm



E-CLICKANNA



E-CLICKYOKO



E-CLICKDIR



E-CLICKCAP



E-CLICKFIX



E-CLICKDWN



E-CLICKBOM



E-CLICKAQUA



E-CLICKZENO




E-CLICKREZA




E-CLICKREF

1 Soraa LED-module op aanvraag.

2 Citizen LED-module niet beschikbaar voor E-Click Directional cassette




color 1M



color 2M



color 14




color 45



Montage-instructie - Instruction de montage - Montageanleitung - Mounting instruction

Equal Click System (Gyproc/Beton) Boring Ø80-82

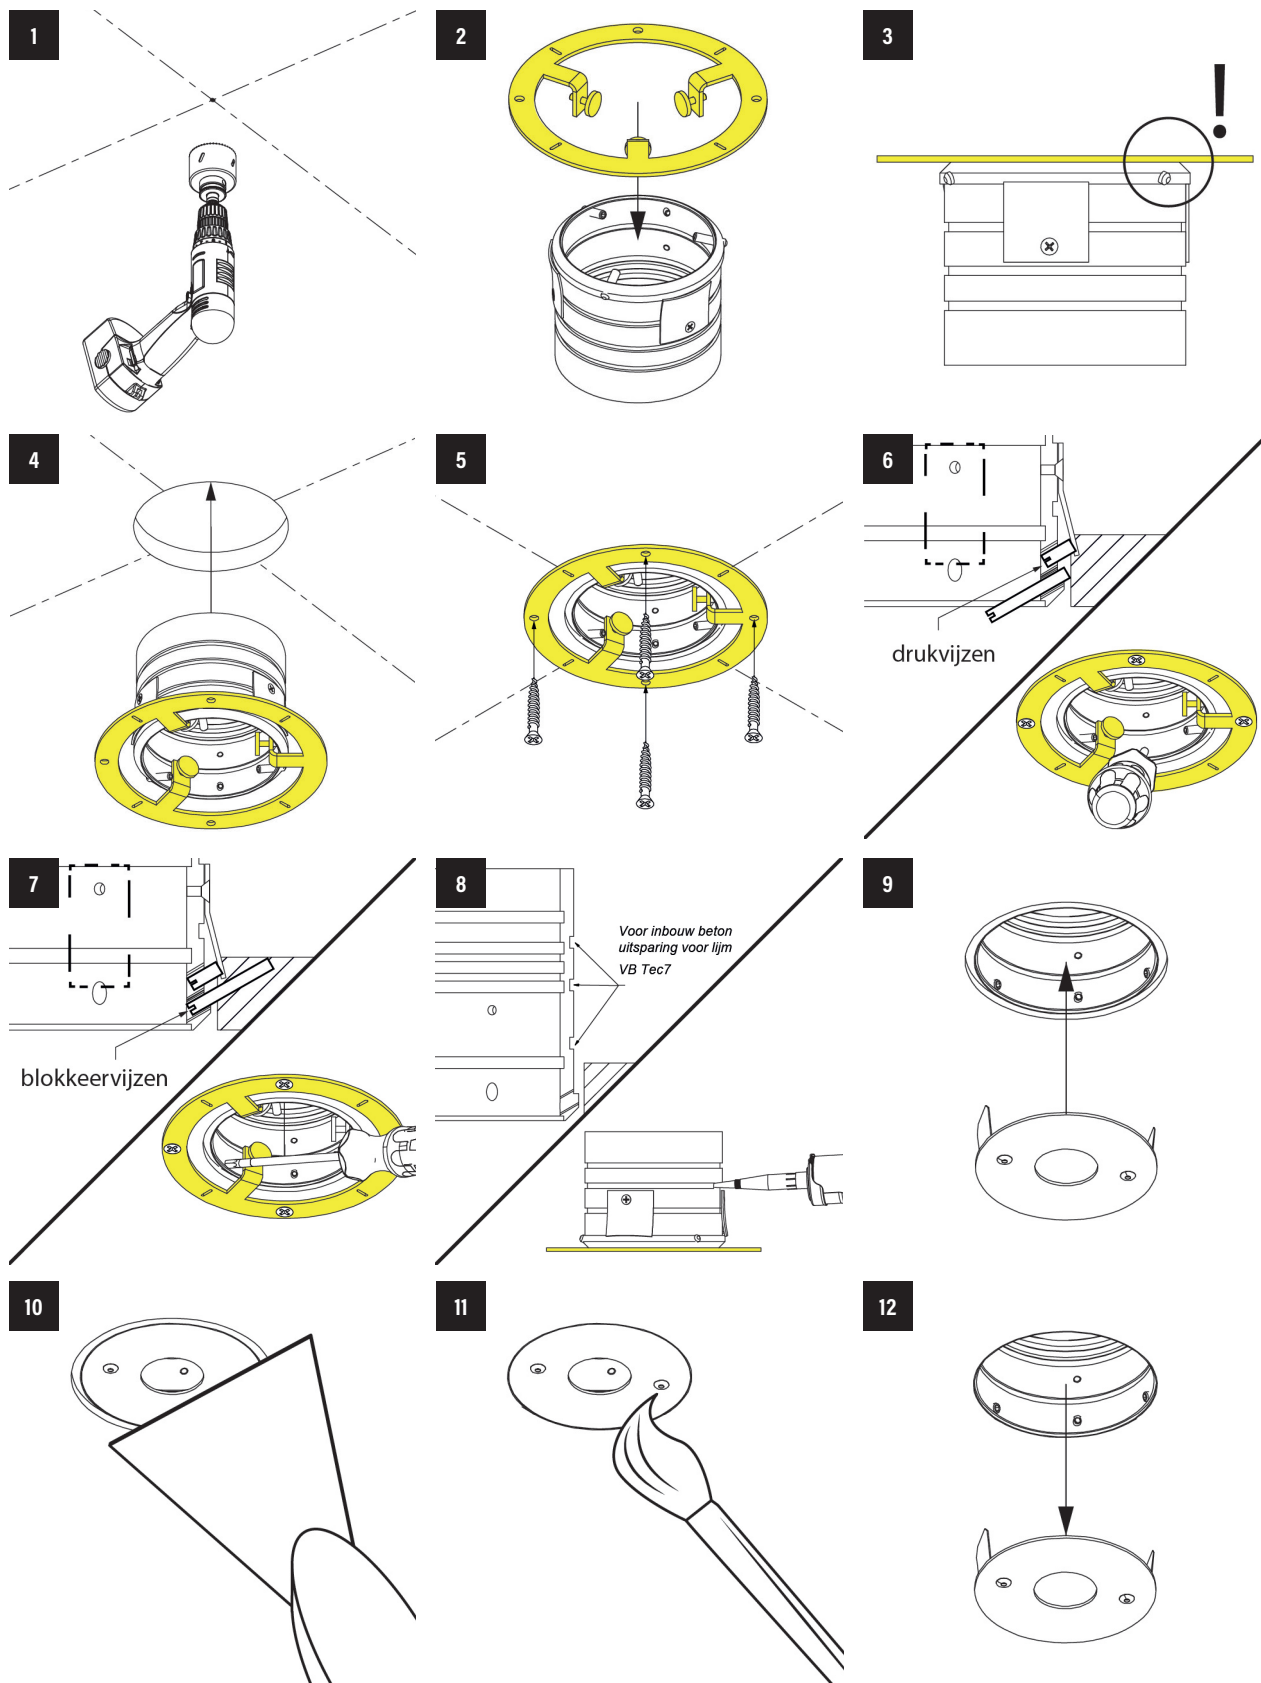

Montage-instructie - Instruction de montage - Montageanleitung - Mounting instruction

Equal Click System (Gyproc/Beton) Boring Ø80-82

patent pending

GEBRUIKSAANWIJZING INSTALLATIE VOOR GYPROC OF BETON INSTALLATION MANUAL FOR GYPROC OR CONCRETE



VOORBEREIDING

ELEKTRICIEN

Maak een verlichtingsplan met afmetingen voor latere boorgaten.
Zet de afmetingen over voor het plaatsen van de bekabeling voor de leidingen.

PLAFONDWERKER

Plaats het kader om de Gyproc-platen te bevestigen.
Werk Gyproc-platen af met plamuur of bepleistering.

ELEKTRICIEN

Fase VOOR de schilderwerken:

Boor gaten (Ø80-82) volgens de afmetingen van het plan (nr. 1).
Neem montagekaliber en ring, plaats het kaliber in de ring (nr. 2) en draai vervolgens de 3 wieltjes gelijkmatig aan zodat ze een geheel vormen. Zorg ervoor dat de ring volledig vlak zit met het kaliber (nr. 3). Zo zorgt u ervoor dat de ring niet scheef wordt gemonteerd.
Neem het geheel (ring + kaliber) en duw het in het plafond of de wand (nr. 4).
Zorg ervoor dat het kaliber volledig vlak zit tegen het plafond. In het kaliber zijn ook gleufgaten voorzien. Zo kan u meerder spots mooi uitlijnen op het plafond. U kan er ook voor kiezen om het montagekaliber tijdelijk te monteren op het plafond (nr. 5).
Draai beurtelings de drukvijzen vast (nr. 6) zodat de veerplaatjes zich vastzetten tegen de wanden.
Draai vervolgens de 3 blokkeervijzen (nr. 7) beurtelings aan tot ze verzonken zijn in de binnenkant van de ring. Deze zullen zich op deze manier vastboren in de Gyproc.
Voor betonboringen kan u naast de veerplaatjes ook Tec7-lijm toevoegen ter hoogte van de buitenste inkepingen (nr. 8).
Controleer of de leidingen juist zitten.
Breng daaropvolgend de afsluitvlood in de ring (nr. 9). Deze zorgt ervoor dat de inbouwring zuiver blijft (zowel voor het pleister- als schilderwerk).

SCHILDER

Werk het schuine kantje van de ring met boorgat verder af met bijvoorbeeld KNAUF RENOBAND (krimpvrij en overschilderbaar na twee uur) (nr.10 & 11).
Na het schilderen kan u dan het vloodje wegnemen (nr.12).

ELEKTRICIEN

Fase NA de schilderwerken:

Na de schilderwerken kan u alle PSM E-CLICK-cassettes gebruiken waaronder 230V, 12V en retrofit LED-lampen alsook onze Xicato, Citizen, Soraa en Tridonic LED-modules.

PREPARATION

ELECTRICIAN

Create lighting plan with dimensions for drill holes.
Transfer the dimensions to lay cabling for ductwork.

CEILING WORKER

Install frame to fix Gyproc panels.
Finish Gyproc panels with putty or plaster.

ELECTRICIAN

Phase BEFORE painting:

Drill holes (Ø80-82) according to the dimensions of the plan (no. 1).
Take mounting jig and ring, place the jig in the ring (no. 2) and then tighten the 3 wheels evenly so that they form a unit. Make sure that the ring is completely flat with the jig (no. 3). This ensures that the ring is not mounted in an angle.
Take the unit (ring + jig) and then push it into the ceiling or wall (no. 4).
Make sure that the jig is completely flat against the ceiling. Slotted holes are also provided in the jig. This way, several spots can be aligned nicely on the ceiling. You can also choose to mount the mounting jig on the ceiling temporarily (no. 5).
Tighten the pressure screws (no. 6) so that the spring plates are fixed to the walls.
Then turn the 3 locking screws (no. 7) alternately until they are recessed into the inside of the ring. These will then drill themselves into the Gyproc.
With concrete drillings, you can add Tec7 adhesive at the height of the outer grooves (no. 8) in addition to the spring plates.
Check if the ductwork is correctly positioned.
Then insert the sealing fleet into the ring (no. 9). This ensures that the mounting ring remains clean (both for plaster and painting).

PAINTER

Finish the bevel edge of the ring with the drilled hole with for example KNAUF RENOBAND (shrink-proof and paintable after two hours) (no.10 & 11).
After painting the fleet can be removed (no.12).

ELECTRICIAN

Phase AFTER painting:

After the painting phase, all PSM E-CLICK cassettes can be used including 230V, 12V and retrofit LED lamps as well as our Xicato, Citizen, Soraa and Tridonic LED modules.

INDOOR | Ceiling UP | Spots | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-RING-GYPROC/.. - Ø80-82 EQUAL CLICK SYSTEM GYPROC

IP20  0.1600 



built-in ring - round - for ceiling in gyproc

Dimensions

→ Ø82xH65 mm

 Ø80-82 mm

└┘ 80 mm

Ref

E-RING-GYPROC

Price €

built-in
min. thickness gyproc 12mm
installation depth depends on the cassette

E-RING-CONCRETE/.. - Ø82 EQUAL CLICK SYSTEM CONCRETE

IP20  0.1600 



built-in ring - round - for concrete ceiling

Dimensions

→ Ø82xH65 mm

 Ø82 mm

└┘ 80 mm

Ref

E-RING-CONCRETE

Price €

built-in
installation depth depends on the cassette

E-ROUNDBASE/.. - Ø82 EQUAL CLICK SYSTEM

IP20  0.2100 



built-in ring - round - with edge

Dimensions

→ Ø90xH65 mm

 Ø80-82 mm

└┘ 80 mm

Ref

E-ROUNDBASE.1M

E-ROUNDBASE.2M

E-ROUNDBASE.14

Price €

Materials


Aluminium

1M | 2M | 14

built-in
installation depth depends on the cassette

E-SINGLEBASE/.. - Ø82 EQUAL CLICK SYSTEM

IP20  0.1200 



built-in ring - square - with edge

Dimensions

→ L90xB90xH65 mm

 Ø80-82 mm

└┘ 80 mm

Ref

E-SINGLEBASE.1M

E-SINGLEBASE.2M

E-SINGLEBASE.14

Price €

Materials

Aluminium

1M | 2M | 14

built-in
installation depth depends on the cassette

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.



CEILING UP

SPOTS

INDOOR | Ceiling UP | Spots | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-COVER/.. - EQUAL CLICK SYSTEM

IP20   0.0700 



built-in cassette - reusable cover

Ref	Price €
E-COVER	

for finishing with filler or paintwork
42/5000
for finishing with filler or paintwork

E-CALIBER/.. - EQUAL CLICK SYSTEM

IP20   0.1200 



caliber - reusable caliber for placing ring in concrete or
gyproc ceiling

Ref	Price €
E-CALIBER	

E-SCREWDRIVER/.. - Ø80-82 EQUAL CLICK SYSTEM

IP20   0.0200  0,5 m 



hand tools - torx screwdriver

Dimensions

Ref	Price €
E-SCREWDRIVER	

E-SAWHOLE/.. - EQUAL CLICK SYSTEM

IP20   0.5500 

clock drill - hole saw CMT orange tools



Ø80-82

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH40 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.40.1M	
E-TUBE.40.2M	
E-TUBE.40.14	
E-TUBE.40.45	

IP20






0.1800



built-up



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH60 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.60.1M	
E-TUBE.60.2M	
E-TUBE.60.14	
E-TUBE.60.45	

IP20






0.2600



built-up



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH80 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.80.1M	
E-TUBE.80.2M	
E-TUBE.80.14	
E-TUBE.80.45	

IP20






0.2600




built-up

INDOOR | Ceiling UP | Spots | CAPA

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-TUBE.100/.. - Ø80-82 ECS - BUILT UP

IP20   0.3900 



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH100 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.100.1M	
E-TUBE.100.2M	
E-TUBE.100.14	
E-TUBE.100.45	

built-up

E-TUBE.120/.. - Ø80-82 ECS - BUILT UP

IP20   0.6500 



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH120 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.120.1M	
E-TUBE.120.2M	
E-TUBE.120.14	
E-TUBE.120.45	

built-up

E-TUBE.140/.. - Ø80-82 ECS - BUILT UP

IP20   0.7500 



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH140 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.140.1M	
E-TUBE.140.2M	
E-TUBE.140.14	
E-TUBE.140.45	

built-up

E-TUBE.165/.. - Ø80-82 ECS - BUILT UP

IP20   0.8300 



ceiling light for downlight ECS - round - to be ordered separately

Dimensions

↔ Ø80xH165 mm


Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
E-TUBE.165.1M	
E-TUBE.165.2M	
E-TUBE.165.14	
E-TUBE.165.45	

built-up

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-JOINT1/.. - EQUAL CLICK SYSTEM		IP20		 0.1500	CE
	base for ceiling mounting - round - base for E-TUBE	Ref	Price €		
	Dimensions	E-JOINT1.1M			
	 Ø80xH10 mm	E-JOINT1.2M			
	Materials				
	Aluminium	1M 2M			


combine with E-TUBES and ECS-cassettes

E-JOINT2/.. - EQUAL CLICK SYSTEM		IP20		 0.3200	CE
	base for ceiling mounting - round - base for E-TUBE	Ref	Price €		
	Dimensions	E-JOINT2.1M			
	 L170xB80xH10 mm	E-JOINT2.2M			
	Materials				
	Aluminium	1M 2M			

combine with E-TUBES and ECS-cassettes

E-JOINT3/.. - EQUAL CLICK SYSTEM		IP20		 0.2000	CE
	base for ceiling mounting - round - base for E-TUBE	Ref	Price €		
	Dimensions	E-JOINT3.1M			
	 L260xB80xH10 mm	E-JOINT3.2M			
	Materials				
Aluminium		1M 2M			

combine with E-TUBES and ECS-cassettes

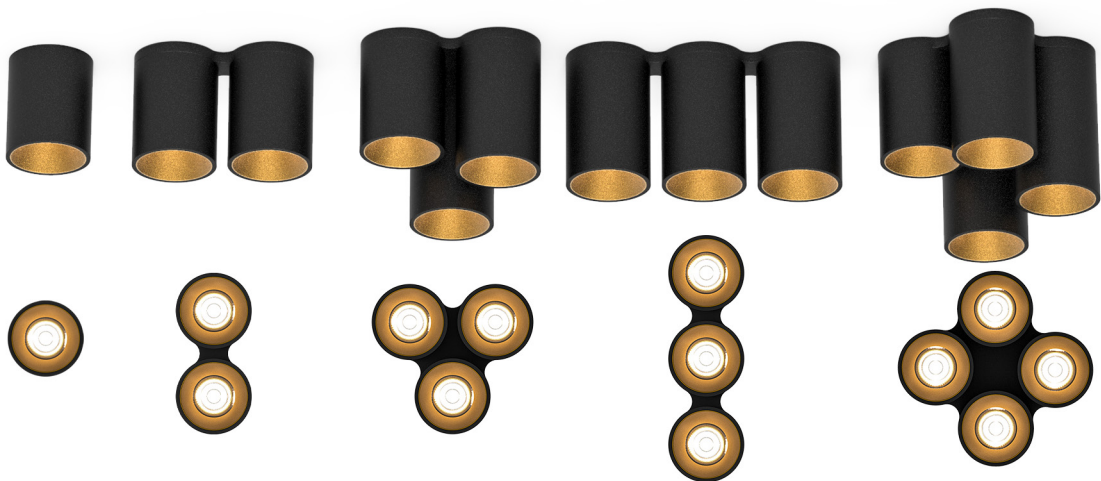

INDOOR | Ceiling UP | Pendants | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-JOINT3T/.. - EQUAL CLICK SYSTEM

IP20  0.6000 



base for ceiling mounting - round - base for E-TUBE

Dimensions

↔ L170xB158xH10 mm

Materials

Aluminium 1M | 2M

Ref

E-JOINT3T.1M

E-JOINT3T.2M

Price €

combine with E-TUBES and ECS-cassettes

E-JOINT3L/.. - EQUAL CLICK SYSTEM

IP20  0.1500 



base for ceiling mounting - round - base for E-TUBE

Dimensions

↔ L170xB158xH10 mm

Materials

Aluminium 1M | 2M

Ref

E-JOINT3L.1M

E-JOINT3L.2M

Price €

combine with E-TUBES and ECS-cassettes

E-JOINT4SQ/.. - EQUAL CLICK SYSTEM

IP20  0.7500 



base for ceiling mounting - round - base for E-TUBE

Dimensions

↔ L170xB170xH10 mm

Materials

Aluminium 1M | 2M

Ref

E-JOINT4SQ.1M

E-JOINT4SQ.2M

Price €

combine with E-TUBES and ECS-cassettes

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.



CEILING UP

PENDANTS

INDOOR | Ceiling UP | Pendants | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-CLICKFIX.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø72xH72 mm 92 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKFIX.ES50.1M

E-CLICKFIX.ES50.2M

E-CLICKFIX.ES50.14

E-CLICKFIX.ES50.45

Price €

built-in

E-CLICKFIX.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø72xH95 mm 115 mm

36°

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKFIX.AC.1M CW | NW | WW

E-CLICKFIX.AC.2M CW | NW | WW

E-CLICKFIX.AC.14 CW | NW | WW


E-CLICKFIX.AC.45 CW | NW | WW

Price €

built-in
dimmable with leading and trailing edge dimmer

E-CLICKFIX.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - fixed - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W 12V

Dimensions

Ø72xH58 mm 78 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKFIX.DICRO.1M

E-CLICKFIX.DICRO.2M

E-CLICKFIX.DICRO.14

E-CLICKFIX.DICRO.45

Price €

built-in

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-CLICKFIX.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH72 mm

√L 82 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKFIX.DC700.1M NW | WW

E-CLICKFIX.DC700.2M NW | WW

E-CLICKFIX.DC700.14 NW | WW

E-CLICKFIX.DC700.45 NW | WW

Price €

built-in

E-CLICKFIX.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH95 mm

√L 115 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKFIX.DC.1M CW | NW | WW

E-CLICKFIX.DC.2M CW | NW | WW

E-CLICKFIX.DC.14 CW | NW | WW

E-CLICKFIX.DC.45 CW | NW | WW

Price €

built-in

8,8W 700LM 250mA on request

E-CLICKFIX.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH95 mm

√L 115 mm

38°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKFIX.XTM.1M NW | WW

E-CLICKFIX.XTM.2M NW | WW

E-CLICKFIX.XTM.14 NW | WW

E-CLICKFIX.XTM.45 NW | WW

Price €

built-in

CRI95 on request

E-CLICKFIX.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



built-in cassette - round - fixed

Lamptype

1x LED 860lm CRI90 max. 10W

230V

Dimensions

Ø72xH117 mm

√L 137 mm

30°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKFIX.ZXO.1M NW | WW

E-CLICKFIX.ZXO.2M NW | WW

E-CLICKFIX.ZXO.14 NW | WW

E-CLICKFIX.ZXO.45 NW | WW

Price €

built-in

dimmable trailing edge

INDOOR | Ceiling UP | Pendants | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-CLICKBOM.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø72xH82 mm 102 mm

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKBOM.ES50.1M

E-CLICKBOM.ES50.2M

E-CLICKBOM.ES50.14

E-CLICKBOM.ES50.65

E-CLICKBOM.ES50.66

E-CLICKBOM.ES50.69

E-CLICKBOM.ES50.45

Price €

built-in

E-CLICKBOM.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø72xH105 mm 125 mm

36°

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKBOM.AC.1M CW | NW | WW

E-CLICKBOM.AC.2M CW | NW | WW

E-CLICKBOM.AC.14 CW | NW | WW

E-CLICKBOM.AC.65 CW | NW | WW

E-CLICKBOM.AC.66 CW | NW | WW

E-CLICKBOM.AC.69 CW | NW | WW

E-CLICKBOM.AC.45 CW | NW | WW

Price €

built-in
dimmable with leading and trailing edge dimmer

E-CLICKBOM.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - fixed - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W 12V

Dimensions

Ø72xH68 mm 88 mm

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKBOM.DICRO.1M

E-CLICKBOM.DICRO.2M

E-CLICKBOM.DICRO.14

E-CLICKBOM.DICRO.66

E-CLICKBOM.DICRO.65

E-CLICKBOM.DICRO.69

E-CLICKBOM.DICRO.45

Price €

built-in

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

E-CLICKBOM.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH82 mm

∇L 92 mm

36°

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKBOM.DC700.1M

E-CLICKBOM.DC700.2M

E-CLICKBOM.DC700.14

E-CLICKBOM.DC700.65

E-CLICKBOM.DC700.66

E-CLICKBOM.DC700.69

E-CLICKBOM.DC700.45

Price €

NW | WW

NW | WW

NW | WW

CW | NW | WW


CW | NW | WW

CW | NW | WW

NW | WW

E-CLICKBOM.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in

8,8W 700LM 250mA on request



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH105 mm

∇L 125 mm

36°

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKBOM.DC.1M

E-CLICKBOM.DC.2M

E-CLICKBOM.DC.14

E-CLICKBOM.DC.65

E-CLICKBOM.DC.66

E-CLICKBOM.DC.69

E-CLICKBOM.DC.45

Price €

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

CW | NW | WW

E-CLICKBOM.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in

CRI95 on request



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH105 mm

∇L 125 mm

38°

Reflector Ø50 mm

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKBOM.XTM.1M

E-CLICKBOM.XTM.2M

E-CLICKBOM.XTM.14

E-CLICKBOM.XTM.65

E-CLICKBOM.XTM.66

E-CLICKBOM.XTM.69

E-CLICKBOM.XTM.45

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

INDOOR | Ceiling UP | Pendants | CAPA

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.



built-in
dimmable trailing edge



built-in cassette - round - fixed

Lamptype
1x LED 860lm CRI90 max. 10W

Dimensions
Ø72xH127 mm
30°
Reflector Ø50 mm

Materials
Alu Anodisé
Aluminium

~230V

IP20

0,5 m

5.6

CE

Ref	Price €
E-CLICKBOM.ZXO.1M	NW WW
E-CLICKBOM.ZXO.2M	NW WW
E-CLICKBOM.ZXO.14	NW WW
E-CLICKBOM.ZXO.65	NW WW
E-CLICKBOM.ZXO.66	NW WW
E-CLICKBOM.ZXO.69	NW WW
E-CLICKBOM.ZXO.45	NW WW

66 | 65 | 69

1M | 2M | 14 | 45



E-CLICKANNA.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



IP20



built-in cassette - round - fixed - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W

230V

Dimensions

Ø72xH83 mm

L 103 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref**Price €**

E-CLICKANNA.ES50.1M



E-CLICKANNA.ES50.2M



E-CLICKANNA.ES50.14



E-CLICKANNA.ES50.45



built-in

E-CLICKANNA.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



IP20



built-in cassette - round - fixed

Lamptype

1x LED 700lm CRI92 max. 9,5W

230V

Dimensions

Ø72xH106 mm

L 126 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref**Price €**

E-CLICKANNA.AC.1M

CW | NW | WW

E-CLICKANNA.AC.2M

CW | NW | WW

E-CLICKANNA.AC.14

CW | NW | WW

E-CLICKANNA.AC.45

CW | NW | WW

built-in
dimmable with leading and trailing edge dimmer**E-CLICKANNA.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM**

~12V



IP20



built-in cassette - round - fixed - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W

12V

Dimensions

Ø72xH69 mm

L 89 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref**Price €**

E-CLICKANNA.DICRO.1M



E-CLICKANNA.DICRO.2M



E-CLICKANNA.DICRO.14



E-CLICKANNA.DICRO.45



built-in

INDOOR | Ceiling IN | System | MINI CLICK SYSTEM

E-CLICKANNA.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH83 mm

93 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKANNA.DC700.1M

NW | WW

E-CLICKANNA.DC700.2M

NW | WW

E-CLICKANNA.DC700.14

NW | WW

E-CLICKANNA.DC700.45

NW | WW

Price €

E-CLICKANNA.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in

8,8W 700LM 250mA on request



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH106 mm

126 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKANNA.DC.1M

CW | NW | WW

E-CLICKANNA.DC.2M

CW | NW | WW

E-CLICKANNA.DC.14

CW | NW | WW

E-CLICKANNA.DC.45

CW | NW | WW

Price €

E-CLICKANNA.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in

CRI95 on request



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH106 mm

126 mm

38°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKANNA.XTM.1M

NW | WW

E-CLICKANNA.XTM.2M

NW | WW

E-CLICKANNA.XTM.14

NW | WW

E-CLICKANNA.XTM.45

NW | WW

Price €

E-CLICKANNA.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



built-in

dimmable trailing edge



built-in cassette - round - fixed

Lamptype

1x LED 860lm CRI90 max. 10W

230V

Dimensions

Ø72xH128 mm

148 mm

30°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKANNA.ZXO.1M

NW | WW

E-CLICKANNA.ZXO.2M

NW | WW

E-CLICKANNA.ZXO.14

NW | WW

E-CLICKANNA.ZXO.45

NW | WW

Price €



CEILING IN

SYSTEM

E-CLICKDWN.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - down - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø72xH90 mm 110 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKDWN.ES50.1M
E-CLICKDWN.ES50.2M
E-CLICKDWN.ES50.14
E-CLICKDWN.ES50.45

Price €

built-in

E-CLICKDWN.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø72xH113 mm 123 mm

36°

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKDWN.AC.1M
E-CLICKDWN.AC.2M
E-CLICKDWN.AC.14
E-CLICKDWN.AC.45

Price €

built-in
dimmable with leading and trailing edge dimmer

E-CLICKDWN.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - fixed - down - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W 12V

Dimensions

Ø72xH77 mm 97 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKDWN.DICRO.1M
E-CLICKDWN.DICRO.2M
E-CLICKDWN.DICRO.14
E-CLICKDWN.DICRO.45

Price €

built-in

E-CLICKDWN.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH90 mm

100 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDWN.DC700.1M

NW | WW

E-CLICKDWN.DC700.2M

NW | WW

E-CLICKDWN.DC700.14

NW | WW

E-CLICKDWN.DC700.45

NW | WW

Price €

built-in

E-CLICKDWN.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH113 mm

133 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDWN.DC.1M

CW | NW | WW

E-CLICKDWN.DC.2M

CW | NW | WW

E-CLICKDWN.DC.14

CW | NW | WW

E-CLICKDWN.DC.45


CW | NW | WW

Price €

built-in
8,8W 700LM 250mA on request

E-CLICKDWN.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH113 mm

133 mm

38°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDWN.XTM.1M

NW | WW

E-CLICKDWN.XTM.2M

NW | WW

E-CLICKDWN.XTM.14

NW | WW

E-CLICKDWN.XTM.45


NW | WW

Price €

built-in
CRI95 on request

E-CLICKDWN.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



built-in cassette - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W

230V

Dimensions

Ø72xH135 mm

155 mm

30°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDWN.ZXO.1M

NW | WW

E-CLICKDWN.ZXO.2M

NW | WW

E-CLICKDWN.ZXO.14

NW | WW

E-CLICKDWN.ZXO.45

NW | WW

Price €

built-in
dimmable trailing edge

INDOOR | Ceiling IN | System | MINI CLICK SYSTEM

E-CLICKDIR.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W

230V

Dimensions

Ø72xH81 mm

101 mm

Materials

Aluminium



1M | 2M | 14 | 45

Ref	Price €
E-CLICKDIR.ES50.1M	
E-CLICKDIR.ES50.2M	
E-CLICKDIR.ES50.14	
E-CLICKDIR.ES50.45	

built-in

E-CLICKDIR.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - directional

Lamptype

1x LED 700lm CRI92 max. 9,5W

230V

Dimensions

Ø72xH110 mm

130 mm

36°

Materials

Aluminium


1M | 2M | 14 | 45

Ref	Price €
E-CLICKDIR.AC.1M	CW NW WW
E-CLICKDIR.AC.2M	CW NW WW
E-CLICKDIR.AC.14	CW NW WW
E-CLICKDIR.AC.45	CW NW WW

built-in
dimmable with leading and trailing edge dimmer

E-CLICKDIR.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - directional - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W

12V

Dimensions

Ø72xH67 mm

87 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref	Price €
E-CLICKDIR.DICRO.1M	
E-CLICKDIR.DICRO.2M	
E-CLICKDIR.DICRO.14	
E-CLICKDIR.DICRO.45	

built-in

E-CLICKDIR.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in cassette - round - directional - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH81 mm

∇L 91 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDIR.DC700.1M

NW | WW

E-CLICKDIR.DC700.2M

NW | WW

E-CLICKDIR.DC700.14

NW | WW

E-CLICKDIR.DC700.45

NW | WW

Price €

built-in

E-CLICKDIR.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in cassette - round - directional - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH110 mm

∇L 130 mm

∇ 36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDIR.DC.1M

CW | NW | WW

E-CLICKDIR.DC.2M

CW | NW | WW

E-CLICKDIR.DC.14

CW | NW | WW

E-CLICKDIR.DC.45

CW | NW | WW

Price €

built-in
8,8W 700LM 250mA on request

E-CLICKDIR.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in cassette - round - directional - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH104 mm

∇L 124 mm

∇ 38°

Reflector Ø50 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKDIR.XTM.1M

NW | WW

E-CLICKDIR.XTM.2M

NW | WW

E-CLICKDIR.XTM.14

NW | WW

E-CLICKDIR.XTM.45

NW | WW


Price €

built-in
CRI95 on request



E-CLICKYOKO.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - down - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø72xH100 mm 120 mm

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKYOKO.ES50.1M

E-CLICKYOKO.ES50.2M

E-CLICKYOKO.ES50.14

E-CLICKYOKO.ES50.65

E-CLICKYOKO.ES50.66

E-CLICKYOKO.ES50.69

E-CLICKYOKO.ES50.45

Price €

built-in

E-CLICKYOKO.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø72xH123 mm 143 mm

36°

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKYOKO.AC.1M CW | NW | WW

E-CLICKYOKO.AC.2M CW | NW | WW

E-CLICKYOKO.AC.14 CW | NW | WW

E-CLICKYOKO.AC.65 CW | NW | WW

E-CLICKYOKO.AC.66 CW | NW | WW

E-CLICKYOKO.AC.69 CW | NW | WW

E-CLICKYOKO.AC.45 CW | NW | WW

Price €

built-in
dimmable with leading and trailing edge dimmer

E-CLICKYOKO.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - fixed - down - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W 12V

Dimensions

Ø72xH86 mm 106 mm

Materials

Alu Anodisé 66 | 65 | 69

Aluminium 1M | 2M | 14 | 45

Ref

E-CLICKYOKO.DICRO.1M

E-CLICKYOKO.DICRO.2M

E-CLICKYOKO.DICRO.14

E-CLICKYOKO.DICRO.65

E-CLICKYOKO.DICRO.66

E-CLICKYOKO.DICRO.69


E-CLICKYOKO.DICRO.45

Price €

built-in

E-CLICKYOKO.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH100 mm

110 mm

36°

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKYOKO.DC700.1M

NW | WW

E-CLICKYOKO.DC700.2M

NW | WW

E-CLICKYOKO.DC700.14

NW | WW

E-CLICKYOKO.DC700.45

NW | WW

E-CLICKYOKO.DC700.66

CW | NW | WW

E-CLICKYOKO.DC700.65

CW | NW | WW


E-CLICKYOKO.DC700.69

CW | NW | WW

Price €

E-CLICKYOKO.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in
8,8W 700LM 250mA on request



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH123 mm

133 mm

36°

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKYOKO.DC.1M

CW | NW | WW

E-CLICKYOKO.DC.2M

CW | NW | WW

E-CLICKYOKO.DC.14

CW | NW | WW

E-CLICKYOKO.DC.65

CW | NW | WW

E-CLICKYOKO.DC.66

CW | NW | WW

E-CLICKYOKO.DC.69

CW | NW | WW


E-CLICKYOKO.DC.45

CW | NW | WW

Price €

E-CLICKYOKO.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in
CRI95 on request



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH123 mm

143 mm

38°

Reflector Ø50 mm

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKYOKO.

XTM.1M

NW | WW

E-CLICKYOKO.

XTM.2M

NW | WW

E-CLICKYOKO.XTM.14

NW | WW

E-CLICKYOKO.XTM.65

NW | WW

E-CLICKYOKO.XTM.66

NW | WW

E-CLICKYOKO.XTM.69

NW | WW

E-CLICKYOKO.XTM.45

NW | WW

Price €

E-CLICKYOKO.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



built-in cassette - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W



230V

Dimensions

Ø72xH145 mm

165 mm

30°

Reflector Ø50 mm

Materials

Alu Anodisé

66 | 65 | 69

Aluminium

1M | 2M | 14 | 45

Ref

Price €

E-CLICKYOKO.ZXO.1M NW | WW

E-CLICKYOKO.ZXO.2M NW | WW

E-CLICKYOKO.ZXO.14 NW | WW

E-CLICKYOKO.ZXO.65 NW | WW

E-CLICKYOKO.ZXO.66 NW | WW

E-CLICKYOKO.ZXO.69 NW | WW

E-CLICKYOKO.ZXO.45 NW | WW

built-in
dimmable trailing edge

E-CLICKREF.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in cassette - round - fixed - with reflector - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W



700mA

Dimensions

Ø72xH105 mm

125 mm

40°

Reflector Ø70 mm

Ref

Price €

E-CLICKREF.XTM NW | WW

built-in
CRI95 on request

E-CLICKREF.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



built-in cassette - round - fixed - with reflector

Lamptype

1x LED 860lm CRI90 max. 10W



230V

Dimensions

Ø72xH127 mm

147 mm

30°

Reflector Ø70 mm

Ref

Price €

E-CLICKREF.ZXO NW | WW

built-in
dimmable trailing edge

E-CLICKCAP.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in

built-in cassette - round - fixed - down - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø72xH109 mm 129 mm


Materials

Alu Anodisé 66 | 65 | 67 | 68 | 69
Aluminium 1 | 2
Messing 7 | 4 | 16 | 124
Rood koper 28 | 126

Ref	Price €
E-CLICKCAP.ES50.1	
E-CLICKCAP.ES50.2	
E-CLICKCAP.ES50.7	
E-CLICKCAP.ES50.4	
E-CLICKCAP.ES50.16	
E-CLICKCAP.ES50.66	
E-CLICKCAP.ES50.65	
E-CLICKCAP.ES50.67	
E-CLICKCAP.ES50.68	
E-CLICKCAP.ES50.69	
E-CLICKCAP.ES50.28	
E-CLICKCAP.ES50.124	
E-CLICKCAP.ES50.126	

E-CLICKCAP.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in
dimmable with leading and trailing edge dimmer

built-in cassette - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø72xH132 mm 152 mm

36°

Materials

Alu Anodisé 66 | 65 | 67 | 68 | 69
Aluminium 1 | 2
Messing 7 | 4 | 16 | 13M | 124
Rood koper 28 | 126

Ref	Price €
E-CLICKCAP.AC.1	CW NW WW
E-CLICKCAP.AC.2	CW NW WW
E-CLICKCAP.AC.7	CW NW WW
E-CLICKCAP.AC.4	CW NW WW
E-CLICKCAP.AC.16	CW NW WW
E-CLICKCAP.AC.66	CW NW WW
E-CLICKCAP.AC.13M	NW WW
E-CLICKCAP.AC.65	CW NW WW
E-CLICKCAP.AC.67	CW NW WW
E-CLICKCAP.AC.68	CW NW WW
E-CLICKCAP.AC.69	CW NW WW
E-CLICKCAP.AC.28	CW NW WW
E-CLICKCAP.AC.124	CW NW WW
E-CLICKCAP.AC.126	CW NW WW

E-CLICKCAP.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in

built-in cassette - round - fixed - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W 12V

Dimensions

Ø72xH95 mm 115 mm

Materials

Alu Anodisé 66 | 65 | 67 | 68 | 69
Aluminium 1 | 2
Messing 7 | 4 | 16 | 124
Rood koper 28 | 126

Ref	Price €
E-CLICKCAP.DICRO.1	
E-CLICKCAP.DICRO.2	
E-CLICKCAP.DICRO.4	
E-CLICKCAP.DICRO.7	
E-CLICKCAP.DICRO.16	
E-CLICKCAP.DICRO.28	
E-CLICKCAP.DICRO.65	
E-CLICKCAP.DICRO.66	
E-CLICKCAP.DICRO.67	
E-CLICKCAP.DICRO.68	
E-CLICKCAP.DICRO.69	
E-CLICKCAP.DICRO.124	
E-CLICKCAP.DICRO.126	

E-CLICKCAP.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

Ø72xH99 mm

√L 119 mm

36°

Materials

Alu Anodisé

66 | 65 | 67 | 68 | 69

Aluminium

1 | 2

Messing

7 | 4 | 16 | 124

Rood koper

28 | 126

Ref

Price €

E-CLICKCAP.DC700.1

NW | WW

E-CLICKCAP.DC700.2

NW | WW

E-CLICKCAP.DC700.4

NW | WW

E-CLICKCAP.DC700.7

NW | WW

E-CLICKCAP.DC700.16

NW | WW

E-CLICKCAP.DC700.28

NW | WW

E-CLICKCAP.DC700.66

CW | NW | WW

E-CLICKCAP.DC700.67

CW | NW | WW

E-CLICKCAP.DC700.65

CW | NW | WW

E-CLICKCAP.DC700.68

CW | NW | WW

E-CLICKCAP.DC700.69

CW | NW | WW

E-CLICKCAP.DC700.124


CW | NW | WW

E-CLICKCAP.DC700.126

CW | NW | WW

E-CLICKCAP.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in
8,8W 700LM 250mA on request



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø72xH132 mm

√L 152 mm

36°

Materials

Alu Anodisé

66 | 65 | 67 | 68 | 69

Aluminium

1 | 2

Messing

7 | 4 | 16 | 124

Rood koper

28 | 126

Ref

Price €

E-CLICKCAP.DC.1

CW | NW | WW

E-CLICKCAP.DC.2

CW | NW | WW

E-CLICKCAP.DC.4

CW | NW | WW

E-CLICKCAP.DC.7

CW | NW | WW

E-CLICKCAP.DC.16

CW | NW | WW

E-CLICKCAP.DC.28

CW | NW | WW

E-CLICKCAP.DC.66

CW | NW | WW

E-CLICKCAP.DC.67

CW | NW | WW

E-CLICKCAP.DC.65

CW | NW | WW

E-CLICKCAP.DC.68

CW | NW | WW

E-CLICKCAP.DC.69

CW | NW

E-CLICKCAP.DC.124


CW | NW | WW

E-CLICKCAP.DC.126

CW | NW | WW

E-CLICKCAP.XTM/.. - Ø80-82 EQUAL CLICK SYSTEM - XICATO LEDMODULE

=700mA



built-in
CRI95 on request



built-in cassette - round - fixed - down - without LED driver

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø72xH132 mm

√L 152 mm

38°

Reflector Ø50 mm

Materials

Alu Anodisé

66 | 65 | 67 | 68 | 69

Aluminium

1 | 2 | 119

Messing

7 | 4 | 16 | 124

Rood koper

28 | 126

Ref

Price €

E-CLICKCAP.XTM.1

NW | WW

E-CLICKCAP.XTM.2

NW | WW

E-CLICKCAP.XTM.4

NW | WW

E-CLICKCAP.XTM.7

NW | WW

E-CLICKCAP.XTM.16

NW | WW

E-CLICKCAP.XTM.28

NW | WW

E-CLICKCAP.XTM.66

CW | NW | WW

E-CLICKCAP.XTM.67

CW | NW | WW

E-CLICKCAP.XTM.65

CW | NW | WW

E-CLICKCAP.XTM.68

CW | NW | WW

E-CLICKCAP.XTM.69

CW | NW

E-CLICKCAP.XTM.119

CW | NW | WW

E-CLICKCAP.XTM.124

CW | NW | WW

E-CLICKCAP.XTM.126

CW | NW | WW

E-CLICKCAP.ZXO/.. - Ø80-82 EQUAL CLICK SYSTEM - 230V LEDMODULE

~230V



*built-in
dimmable trailing edge*



built-in cassette - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W

230V

Dimensions

→ Ø72xH154 mm

↙ 174 mm

△ 30°

Reflector Ø50 mm

Materials

Alu Anodisé

66 | 65 | 67 | 68 | 69

Aluminium

1 | 2

Messing

7 | 4 | 16 | 124


Rood koper

28 | 126

Ref

Price €

E-CLICKCAP.ZXO.1	NW WW
E-CLICKCAP.ZXO.2	NW WW
E-CLICKCAP.ZXO.4	NW WW
E-CLICKCAP.ZXO.7	NW WW
E-CLICKCAP.ZXO.16	NW WW
E-CLICKCAP.ZXO.28	NW WW
E-CLICKCAP.ZXO.66	NW WW
E-CLICKCAP.ZXO.67	NW WW
E-CLICKCAP.ZXO.65	NW WW
E-CLICKCAP.ZXO.68	NW WW
E-CLICKCAP.ZXO.69	NW WW
E-CLICKCAP.ZXO.124	NW WW
E-CLICKCAP.ZXO.126	NW WW

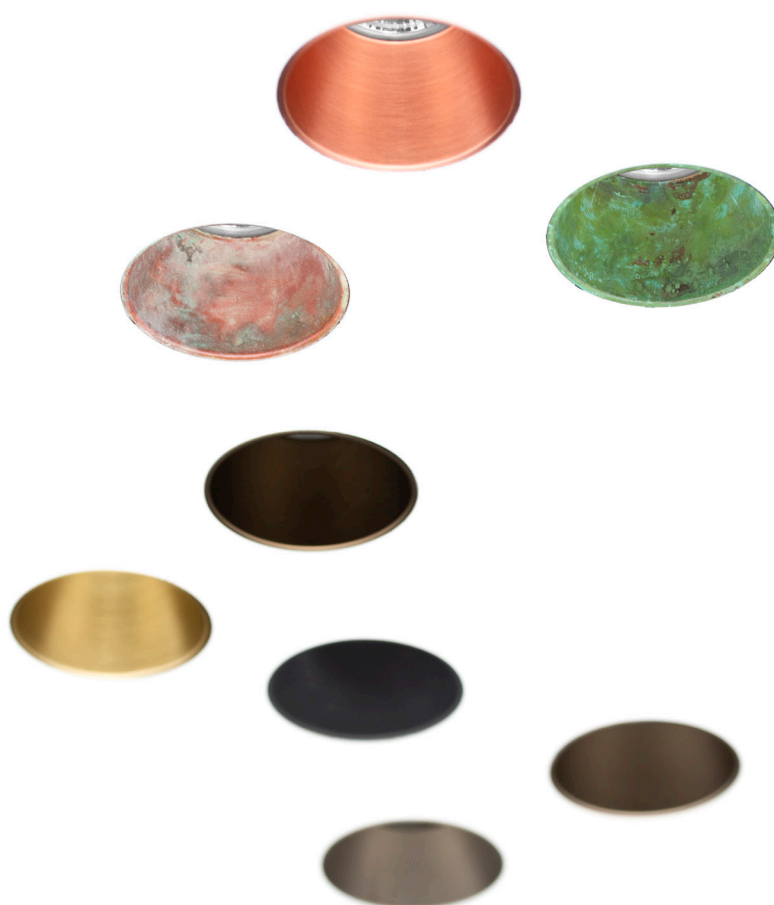

E-CLICKAQUA.ES50/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W

230V

Dimensions

Ø72xH93 mm

113 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKAQUA.ES50.1M

E-CLICKAQUA.ES50.2M

E-CLICKAQUA.ES50.14

E-CLICKAQUA.ES50.45

Price €

built-in

E-CLICKAQUA.AC/.. - Ø80-82 EQUAL CLICK SYSTEM

~230V



built-in cassette - round - fixed

Lamptype

1x LED 700lm CRI92 max. 9,5W

230V

Dimensions

Ø72xH110 mm

130 mm

36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKAQUA.AC.1M NW | WW

E-CLICKAQUA.AC.2M NW | WW

E-CLICKAQUA.AC.14 NW | WW

E-CLICKAQUA.AC.45 NW | WW

Price €

built-in

dimmable with leading and trailing edge dimmer

E-CLICKAQUA.DICRO/.. - Ø80-82 EQUAL CLICK SYSTEM

~12V



built-in cassette - round - fixed - without LED lamp - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 20W

12V

Dimensions

Ø72xH79 mm

99 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKAQUA.DICRO.1M

E-CLICKAQUA.DICRO.2M

E-CLICKAQUA.DICRO.14

E-CLICKAQUA.DICRO.45

Price €

built-in



color 1



Color 2



Color 4



Color 7




Color 16



Color 28

E-CLICKAQUA.DC700/.. - Ø80-82 EQUAL CLICK SYSTEM

=250mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 700lm CRI92 max. 8,8W

250mA

Dimensions

→ Ø72xH83 mm

↙ 93 mm

△ 36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKAQUA.DC700.1M

● NW | WW

E-CLICKAQUA.DC700.2M

● NW | WW

E-CLICKAQUA.DC700.14

● NW | WW

E-CLICKAQUA.DC700.45

● NW | WW

Price €

built-in
8,8W 700LM 250mA on request

E-CLICKAQUA.DC/.. - Ø80-82 EQUAL CLICK SYSTEM

=350mA



built-in cassette - round - fixed - without LED driver

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

→ Ø72xH110 mm

↙ 130 mm

△ 36°

Materials

Aluminium

1M | 2M | 14 | 45

Ref

E-CLICKAQUA.DC.1M

● NW | WW

E-CLICKAQUA.DC.2M

● NW | WW

E-CLICKAQUA.DC.14


● NW | WW

E-CLICKAQUA.DC.45

● NW | WW


Price €

built-in
8,8W 700LM 250mA on request

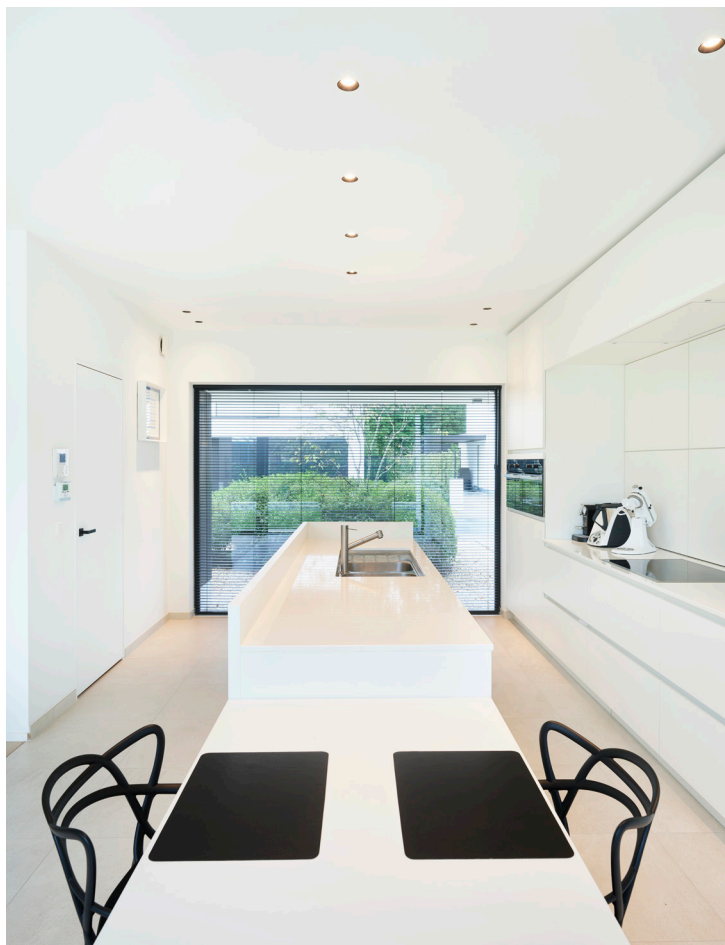

E-CLICKZENO/.. - Ø80-82 EQUAL CLICK SYSTEM

IP20   



built-in cassette for spotlight or pendant - round

Dimensions

↔ Ø72xH24 mm

⌋⌋ 65 mm

Materials

Aluminium

1M | 2M | 14 | 45

Ref

Price €

E-CLICKZENO.1M



E-CLICKZENO.2M



E-CLICKZENO.14



E-CLICKZENO.45



built-in

E-CLICKREZA/.. - Ø80-82 EQUAL CLICK SYSTEM

IP20   



built-in cassette for spotlight or pendant - round

Dimensions

↔ Ø72xH44 mm

⌋⌋ 65 mm

Materials

Aluminium

1M | 2M | 14 | 45

Messing

16 | 13 | 13M | 23

Ref

Price €

E-CLICKREZA.1M



E-CLICKREZA.2M



E-CLICKREZA.14



E-CLICKREZA.16



E-CLICKREZA.45



E-CLICKREZA.13



E-CLICKREZA.13M



E-CLICKREZA.23



built-in



2071/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø80xH130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 29 | 49 | 47 | 77

Ref

2071.1M

2071.2M

2071.29

2071.49

2071.47


2071.77

Price €

built-up
standard with YOKO-cassette - other cassettes on
request

2072/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

2x QPAR 51 GU10 max. 20W 230V

Dimensions

L170xB80xH130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 29 | 49 | 47 | 77

Ref

2072.1M

2072.2M

2072.29

2072.47

2072.77



2072.49

Price €

built-up
standard with YOKO-cassette - other cassettes on
request

2073/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

3x QPAR 51 GU10 max. 20W 230V

Dimensions

L260xB80xH130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 29 | 49 | 47 | 77

Ref

2073.1M

2073.2M

2073.29

2073.47

2073.77


2073.49

Price €

built-up
standard with YOKO-cassette - other cassettes on request
standard with YOKO-cassette - other cassettes on request

2073T/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

3x QPAR 51 GU10 max. 20W 230V

Dimensions

L170xB170xH130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 127 | 29 | 49 | 47 | 77

Ref

2073T.1M

2073T.2M

2073T.29

2073T.47

2073T.77

2073T.49



2073T.127

Price €

built-up
standard with YOKO-cassette - other cassettes on
request

2073L/.. - EQUAL

~230V



built-up ceiling light - round - fixed

Lamptype

3x QPAR 51 GU10 max. 20W 230V

Dimensions

L 170xB 170xH 130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 29 | 49 | 47 | 77

Ref

2073L.1M

2073L.2M

2073L.29

2073L.47

2073L.77


2073L.49

Price €

built-up
standard with YOKO-cassette - other cassettes on
request

2074SQ/.. - EQUAL

~230V

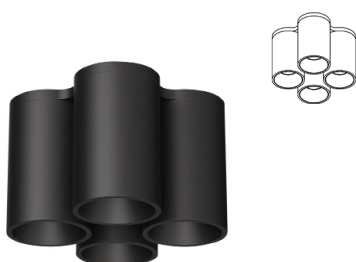

built-up ceiling light - round - fixed - down

Lamptype

4x QPAR 51 GU10 max. 20W 230V

Dimensions

L 170xB 170xH 130 mm tube Ø80xH120 mm

Materials

Aluminium 1M | 2M | 29 | 49 | 47 | 77

Ref

2074SQ.1M

2074SQ.2M

2074SQ.29


2074SQ.47

2074SQ.77

2074SQ.49

Price €

built-up
standard with YOKO-cassette - other cassettes on
request

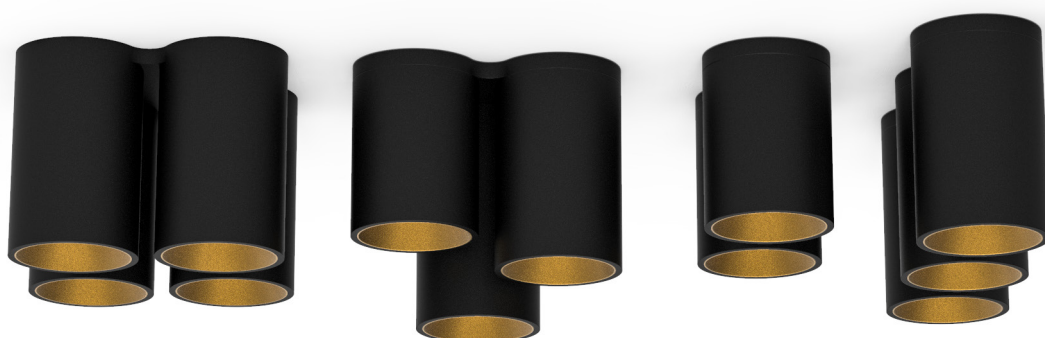

2081/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L 80xH150 mm

36°

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2081.1M

2081.2M

2081.29

2081.49

2081.47

2081.77

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on request

2082/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

2x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L 170xB80xH150 mm

36°

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2082.1M

2082.2M

2082.29

2082.49

2082.47

2082.77

Price €

NW | WW

NW | WW

NW | WW

NW | WW


NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on request

2083/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

3x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L 260xB80xH150 mm

36°

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2083.1M

2083.2M

2083.29

2083.47

2083.77

2083.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on request

2083T/.. - EQUAL

~230V



built-up ceiling light - round - fixed - down

Lamptype

3x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L 170xB170xH150 mm

36°

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2083T.1M

2083T.2M

2083T.29

2083T.49

2083T.47

2083T.77

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on request

2083L/.. - EQUAL

~230V



IP20



built-up ceiling light - round - fixed

Lamptype

3x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L170xB170xH150 mm $\angle 36^\circ$

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2083L.1M

2083L.2M

2083L.29

2083L.49

2083L.47

2083L.77

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on
request

2084SQ/.. - EQUAL

~230V



IP20



built-up ceiling light - round - fixed - down

Lamptype

4x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L170xB170xH150 mm $\angle 36^\circ$

tube Ø80xH140 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

2084SQ.1M

2084SQ.2M

2084SQ.29

2084SQ.47

2084SQ.77

2084SQ.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up
standard with YOKO-cassette - other cassettes on
request



2085/.. - EQUAL

~230V



built-up ceiling light - round - fixed

Lamptype

2x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L170xB80xH175 mm

36°

tube Ø80xH140 mm

tube Ø80xH165 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

Price €

2085.1M

NW | WW

2085.2M

NW | WW

2085.29

NW | WW

2085.47

NW | WW

2085.77

NW | WW


2085.49

NW | WW

built-up
standard with YOKO-cassette - other cassettes on
request

2086T/.. - EQUAL

~230V



built-up ceiling light - round - fixed

Lamptype

3x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L170xB170xH175 mm

36°

tube Ø80xH140 mm

tube Ø80xH165 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

Price €

2086T.1M

NW | WW

2086T.2M

NW | WW

2086T.29

NW | WW

2086T.47

NW | WW

2086T.77

NW | WW

2086T.49

NW | WW

built-up
standard with YOKO-cassette - other cassettes on
request

2087SQ/.. - EQUAL

~230V



built-up ceiling light - round - fixed

Lamptype

4x LED 700lm CRI92 max. 9,5W

230V

Dimensions

L170xB170xH175 mm

36°

tube Ø80xH140 mm

tube Ø80xH165 mm

Materials

Aluminium

1M | 2M | 29 | 49 | 47 | 77

Ref

Price €

2087SQ.1M

NW | WW

2087SQ.2M

NW | WW

2087SQ.29

NW | WW

2087SQ.47

NW | WW

2087SQ.77

NW | WW

2087SQ.49

NW | WW

built-up
standard with YOKO-cassette - other cassettes on
request



CEILING UP

LUMINAIRES







Equal

Groendreef 60
9880 Aalter
T +32 9 374 19 51
www.psmlighting.com



psmlighting
100% Made in Belgium