



Mary

EASY CLICK rail systems



psmighting

Delighted to help you



All information in this catalogue is without engagement.
Psmighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.
Read instructions carefully. The general psmighting sales conditions are always applicable.
Nothing in this catalogue can be reproduced without permission in writing from the psmighting bv company.

4802/.. - MARY 1FASE


~230V



IP20



1.5000

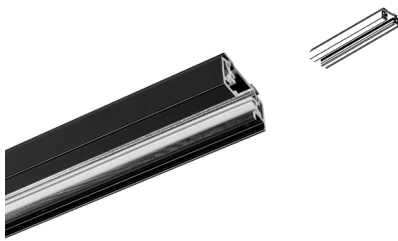

track - Track 2 meter for 1 circuit

Dimensions

↔ L2000xB35xH20 mm

Materials

Aluminium

1 | 2

Ref

4802.1

4802.2

Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4803/.. - MARY 1FASE


~230V



IP20



2.1300

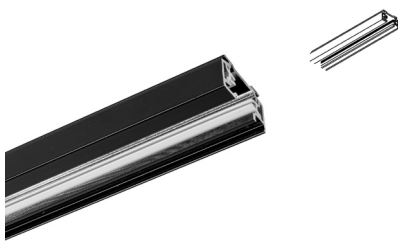

track - Track 3 meter for 1 circuit

Dimensions

↔ L3000xB35xH20 mm

Materials

Aluminium

1 | 2

Ref

4803.1

4803.2

Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4804/.. - MARY 1FASE


~230V



IP20



2.5000

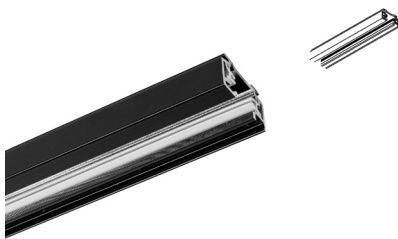

track - Track 4 meter for 1 circuit

Dimensions

↔ L4000xB35xH20 mm

Materials

Aluminium

1 | 2

Ref

4804.1

4804.2

Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

INDOOR | Ceiling UP | TRACK | MARY 1F

4811/.. - MARY 1FASE

~230V



IP20



power supply for busbar system - End feed

Materials

Aluminium

1 | 2

Ref

4811.1


4811.2

Price €

built-up
Please attach drawing to the order!

4813/.. - MARY 1FASE

IP20



accessories for track systems - End cap

Materials

Aluminium

1 | 2

Ref

4813.1

4813.2

Price €

built-up

4814/.. - MARY 1FASE

~230V



IP20



Connection joinings - Straight coupler

Materials

Aluminium

1 | 2



Ref

4814.1

4814.2

Price €

built-up

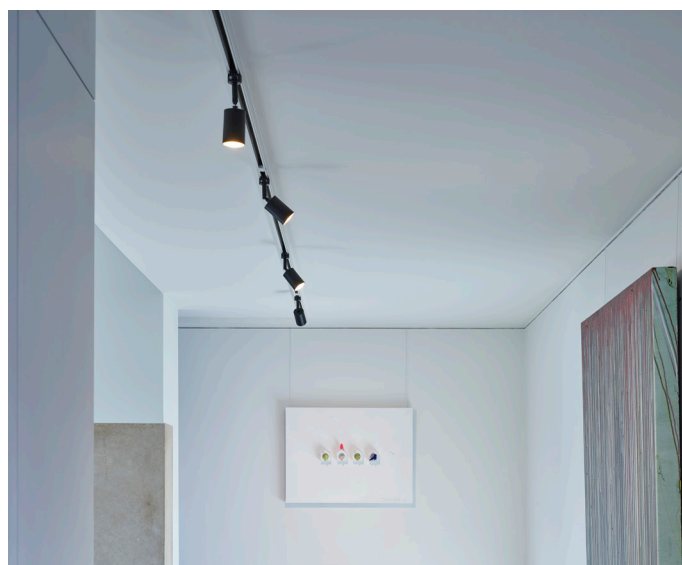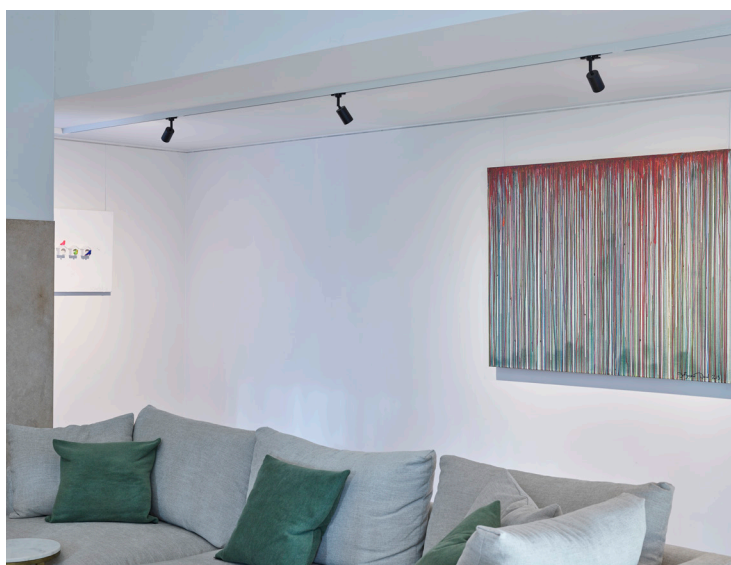

4807/.. - MARY 1FASE

~230V



IP20



Connection joinings - I-connector with connection option for power supply

Dimensions

↔ L107xB36xH23 mm

Materials

Aluminium

1 | 2

Ref Price €

4807.1



4807.2



built-up

4808/.. - MARY 1FASE

~230V



IP20



Connection joinings - T-connector with connection option for power supply - grounding inside

Dimensions

↔ L71xB71xH23 mm

Materials

Aluminium

1 | 2

Ref Price €

4808.1



4808.2



built-up


Please attach drawing to the order!

4810/.. - MARY 1FASE

~230V



IP20



Connection joinings - X-connector with connection option for power supply

Dimensions

↔ L78xB78xH23 mm

Materials

Aluminium

1 | 2

Ref Price €

4810.1



4810.2



built-up

4815/.. - MARY 1FASE

~230V



IP20



Connection joinings - L-connector with connection option for power supply - grounding inside

Dimensions

↔ L71xB71xH23 mm

Materials

Aluminium

1 | 2

Ref Price €

4815.1



4815.2



built-up

Please attach drawing to the order!

4816/.. - MARY 1FASE

~230V



IP20



Connection joinings - Flex-connector

Materials

Aluminium

1 | 2

Ref

4816.1

4816.2

Price €




*built-up
from 60° to 300°*

4817/.. - MARY 1FASE

~230V



IP20



Connection joinings - Y-connector with connection option for power supply

Dimensions

↔ L78xB78xH23 mm

Materials

Aluminium

1 | 2

Ref

4817.1

4817.2

Price €



*built-up
Please attach drawing to the order!*

4820/.. - MARY 1FASE

~230V



IP20



adapter - Multi-adaptor for 1 circuit track + retaining collar M10x1

Dimensions

↔ L130 mm

Materials

Aluminium

1 | 2

Ref

4820.1

4820.2

Price €



built-up



4805/.. - MARY 1FASE

~230V



IP20



1.5 m



accessories for track systems - Adaptor for suspension - steel cable 1,5m

Ref

4805

Price €

built-up

4806/.. - MARY 1FASE

~230V



IP20



3 m



accessories for track systems - Adaptor for suspension - steel cable 3m

Ref


4806

Price €

built-up


CEILING UP

TRACK

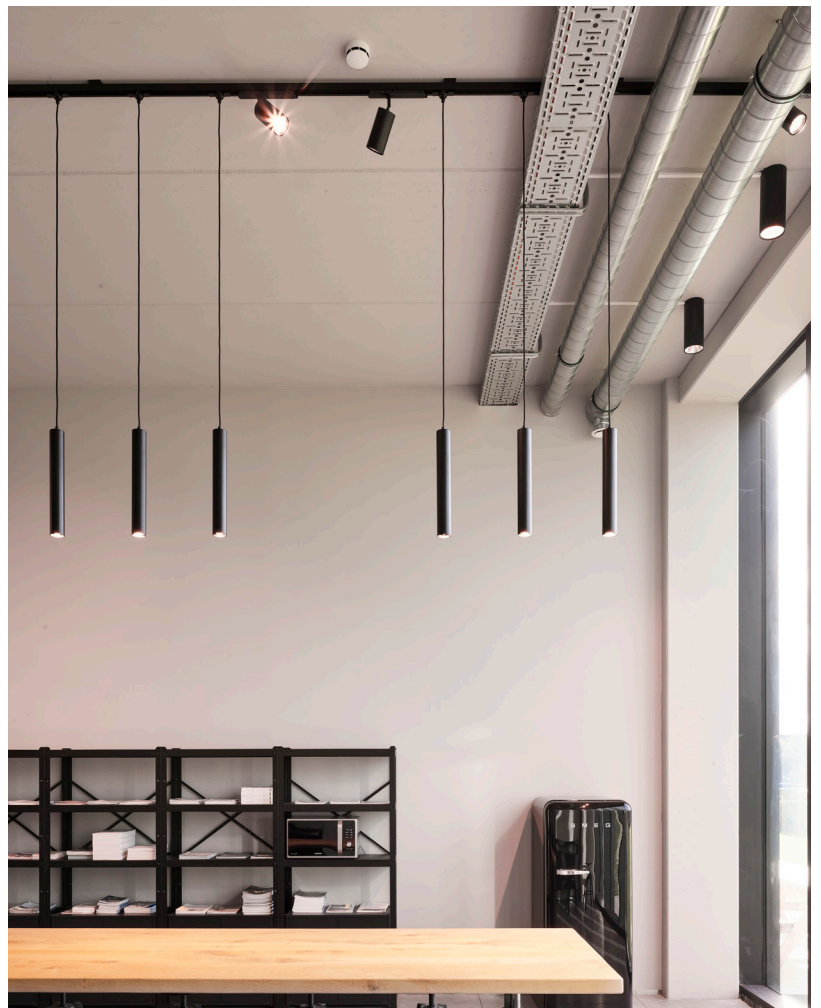

4820.7700/.. - MARY CAPA ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V
1x QPAR70 GU10 max. 8W 230V

Dimensions

Ø32xH84 mm 50 mm

Head Ø32xH40 mm

Materials

Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 23

Ref	Price €
4820.7700.1M	
4820.7700.2M	
4820.7700.14	
4820.7700.11M	
4820.7700.4	
4820.7700.16	
4820.7700.13	
4820.7700.23	

built-up

4820.7800/.. - MARY CAPA X ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

Ø54xH140 mm Head Ø54xH85 mm

Materials


Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 13M | 23

Ref	Price €
4820.7800.1M	
4820.7800.2M	
4820.7800.14	
4820.7800.11M	
4820.7800.4	
4820.7800.16	
4820.7800.13	
4820.7800.13M	
4820.7800.23	

built-up

4820.7600/.. - MARY CAPA AC ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

Ø58xH180 mm 36°

Head Ø58xH130 mm

Materials

Aluminium 1M | 2M | 14 | 45
Messing 4 | 16

Ref	Price €
4820.7600.1M	CW NW WW
4820.7600.2M	CW NW WW
4820.7600.14	CW NW WW
4820.7600.4	CW NW WW
4820.7600.16	CW NW WW
4820.7600.45	CW NW WW

built-up
dimmable leading and trailing edge

4820.1837/.. - MARY MERO ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 860lm CRI90 max. 10W 230V

Dimensions

Ø80xH180 mm 30°

Head Ø80xH120 mm

Materials

Aluminium 1M | 2M

Ref	Price €
4820.1837.1M	NW WW
4820.1837.2M	NW WW

built-up
to combine with adaptor or on a profile




CEILING UP

TRACK

4820.7606/.. - MARY FIXER ADAPTOR

~230V



built-up spot with adaptor - square - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

↔ L60xB60xH150 mm Head L60xB60xH90 mm

Materials

Aluminium 1M | 2M | 14 | 11M

Ref	Price €
4820.7606.1M	
4820.7606.2M	
4820.7606.11M	
4820.7606.14	

built-up

4820.7603/.. - MARY FIXER AC ADAPTOR

~230V



built-up spot with adaptor - square - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

↔ L60xB60xH185 mm 36°

Head L60xB60xH125 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
4820.7603.1M	CW NW WW
4820.7603.2M	CW NW WW
4820.7603.14	CW NW WW
4820.7603.45	CW NW WW

built-up
dimmable with leading and trailing edge dimmer

4820.3000/.. - MARY BABETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø80xH109 mm 28°

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16

Ref	Price €
4820.3000.1M	NW WW
4820.3000.2M	NW WW
4820.3000.49	NW WW
4820.3000.29	NW WW
4820.3000.16	NW WW

built-up

4820.2730/.. - MARY SUZETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø70xH130 mm 30°

Head Ø70xH80 mm

Materials

Aluminium 1M | 2M
Aluminium / Messing 216

Ref	Price €
4820.2730.1M	NW WW
4820.2730.2M	NW WW
4820.2730.216	NW WW

built-up





CEILING UP

TRACK

INDOOR | Ceiling UP | TRACK | MARY 1F

4820.5003A/.. - MARY MAESTRO

~230V



suspension with adapter - round - fixed - without LED lamp

Lamptype

1x A60 E27 max. 10,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

4820.5003A.1M.TX1


4820.5003A.2M.TX2

Price €

built-up

4820.1842/.. - MARY MERO

~230V



suspension with adapter - round - fixed - tube 300mm

Lamptype

1x LED 700lm CRI92 9,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

4820.1842.1M.TX1


4820.1842.2M.TX2

Price €

built-up

4820.5043E/.. - MARY MOBY DECO

~230V



suspension with adapter - round - fixed - without LED lamp

Lamptype

1x A60 E27 max. 10,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

4820.5043E.1M.TR.TX1

4820.5043E.2M.ST.TX2

Price €

built-up



CEILING UP


TRACK

8110/.. - MARY 3FASE TRACK

~230V



IP20

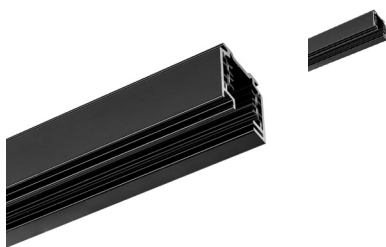

track - Track 2 meter for 3 circuits

Dimensions

↔ L2000 mm

Materials

Aluminium

1 | 2

Ref

Price €

8110.1



8110.2




built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

8111/.. - MARY 3FASE TRACK

~230V



IP20

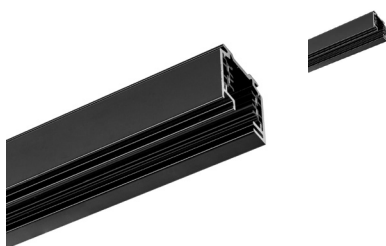

track - Track 3 meter for 3 circuits

Dimensions

↔ L3000 mm

Materials

Aluminium

1 | 2

Ref

Price €

8111.1



8111.2




built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

8139/.. - MARY 3FASE TRACK

~230V



IP20

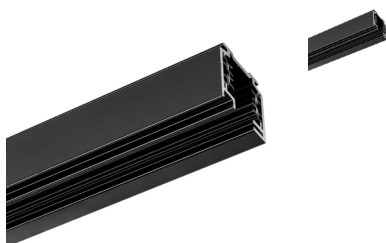

track - Track 4 meter for 3 circuits

Dimensions

↔ L4000 mm

Base L35xB35 mm

Materials

Aluminium

1 | 2

Ref

Price €

8139.1



8139.2



built-up
extra transport cost - long profile

8112/.. - MARY 3FASE FEEDING

~230V  IP20    CE



power supply for busbar system - End feed

Materials

Aluminium

1 | 2

Ref	Price €
8112.1	
8112.2	

built-up

8113/.. - MARY 3FASE TRACK

IP20    CE



accessories for track systems - End cap

Materials

Aluminium

1 | 2

Ref	Price €
8113.1	
8113.2	

built-up

8114/.. - MARY 3FASE TRACK

~230V  IP20    CE



Connection joinings - Straight coupler

Materials

Aluminium


1 | 2

Ref	Price €
8114.1	
8114.2	

built-up

8115/.. - MARY 3FASE ADAPTOR

~230V  IP20    CE

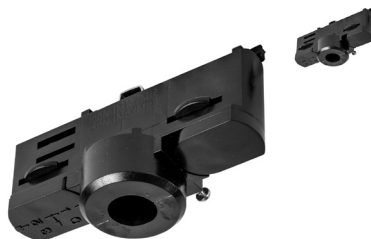

adapter - Multi-adaptor for 3 circuit track + retaining collar M10x1

Materials

Aluminium

1 | 2

Ref	Price €
8115.1	
8115.2	


built-up
max. 5kg

8120/.. - MARY 3FASE TRACK

~230V



IP20

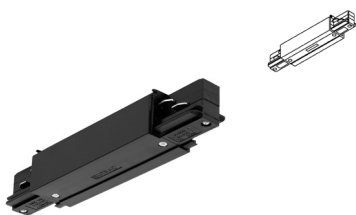

Connection joinings - I-connector with connection option for power supply

Dimensions

↔ L 120 mm

Materials

Aluminium

1 | 2

Ref

8120.1

8120.2

Price €

built-up

8121/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - L-connector with connection option for power supply - grounding outside

Dimensions

↔ L78xB78xH23 mm

Materials

Aluminium

1 | 2

Ref

8121.1

8121.2

Price €

built-up

Please attach drawing to the order!

8122/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - L-connector with connection option for power supply - grounding inside

Dimensions

↔ L78xB78xH23 mm

Materials

Aluminium

1 | 2

Ref

8122.1

8122.2

Price €

built-up

Please attach drawing to the order!

8123/.. - MARY 3FASE TRACK

IP20



Connection joinings - I-connector with connection option for power supply

Materials

Aluminium

1 | 2

Ref

8123.1

8123.2

Price €



CEILING UP

TRACK

8140/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Hanging clip for 3-phase track suspension

Dimensions

↔ L50xB35xH20 mm

Materials

Aluminium

1 | 2

Ref

8140.1

8140.2

Price €



built-up

8141/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Hanging clip for 3-phase track connector suspension

Dimensions

↔ L100xB35xH20 mm

Materials

Aluminium

1 | 2

Ref

8141.1

8141.2

Price €



built-up

8142/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Steel suspension cable 3 meters for 3-phase track

Dimensions

Cable 3000 mm

Cable L3000 mm

Materials

Aluminium

Ref

8142

Price €

built-up

8143/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Steel suspension cable 6,2 meters for 3-phase track

Dimensions

Cable 6200 mm

Cable L6200 mm

Materials

Aluminium

Ref

8143

Price €


built-up

8125/.. - MARY 3FASE TRACK

~230V



IP20

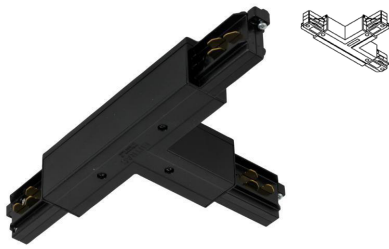

Connection joinings - T-connector with connection option for power supply - grounding outside

Dimensions

↔ L78xB78xH mm

Materials

Aluminium

1 | 2

Ref	Price €
8125.1	●
8125.2	●


built-up
Please attach drawing to the order!

8126/.. - MARY 3FASE TRACK

~230V



IP20

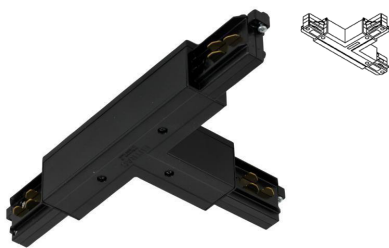

Connection joinings - T-connector with connection option for power supply - grounding inside

Dimensions

↔ L78xB78xH mm

Materials

Aluminium

1 | 2

Ref	Price €
8126.1	●
8126.2	●

built-up
Please attach drawing to the order!

CEILING UP

TRACK



8127.250/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 12W | 250mA | not dimmable | 10-42V

Dimensions

158X31 mm

Materials

Aluminium 1 | 2

Ref	Price €
8127.250.1	
8127.250.2	

8127.350/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 16W | 350mA | not dimmable | 10-42V

Dimensions

158X31 mm

Materials

Aluminium 1 | 2

Ref	Price €
8127.350.1	
8127.350.2	

8127.500/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V

Dimensions

158X31 mm

Materials

Aluminium 1 | 2

Ref	Price €
8127.500.1	
8127.500.2	

8127.700/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 33W | 750mA | not dimmable | 10-42V

Dimensions

158X31 mm

Materials

Aluminium 1 | 2

Ref	Price €
8127.700.1	
8127.700.2	



CEILING UP

TRACK



8115.7700/.. - MARY CAPA ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W

230V

1x QPAR70 GU10 max. 8W

230V

Dimensions

↔ Ø32xH84 mm

50 mm

Head Ø32xH40 mm

Materials

Aluminium

1M | 2M | 14 | 11M


Messing

4 | 16 | 13 | 23

Ref

Price €


8115.7700.1M
8115.7700.2M
8115.7700.14
8115.7700.11M
8115.7700.4
8115.7700.16
8115.7700.13
8115.7700.23



built-up

8115.7800/.. - MARY CAPA X ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W

230V

Dimensions

↔ Ø54xH140 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M | 14 | 11M

Messing

4 | 16 | 13 | 13M | 23

Ref

Price €


8115.7800.1M
8115.7800.2M
8115.7800.14
8115.7800.11M
8115.7800.4
8115.7800.16
8115.7800.13
8115.7800.13M
8115.7800.23



built-up

8115.7600/.. - MARY CAPA AC ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W

230V

Dimensions

↔ Ø58xH180 mm

36°

Head Ø58xH130 mm

Materials

Aluminium

1M | 2M | 14 | 45

Messing

4 | 16

Ref

Price €

8115.7600.1M
8115.7600.2M
8115.7600.14
8115.7600.4
8115.7600.16
8115.7600.45


CW | NW | WW
CW | NW | WW
CW | NW | WW
CW | NW | WW
CW | NW | WW
CW | NW | WW

built-up

dimmable leading and trailing edge

8115.1837/.. - MARY MERO ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 860lm CRI90 max. 10W

230V

Dimensions

↔ Ø80xH180 mm

30°

Head Ø80xH120 mm

Materials

Aluminium

1M | 2M

Ref

Price €

8115.1837.1M
8115.1837.2M


NW | WW
NW | WW

built-up

to combine with adaptor or on a profile

8115.7606/.. - MARY FIXER ADAPTOR

~230V



built-up spot with adaptor - square - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

L60xB60xH150 mm Head L60xB60xH90 mm

Materials

Aluminium 1M | 2M | 14 | 11M

Ref	Price €
8115.7606.1M	
8115.7606.2M	
8115.7606.11M	
8115.7606.14	

built-up

8115.7603/.. - MARY FIXER AC ADAPTOR

~230V



built-up spot with adaptor - square - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

L60xB60xH185 mm 36°

Head L60xB60xH125 mm

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
8115.7603.1M	CW NW WW
8115.7603.2M	CW NW WW
8115.7603.14	CW NW WW
8115.7603.45	CW NW WW

built-up
dimmable with leading and trailing edge dimmer

8115.3000/.. - MARY BABETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

Ø80xH109 mm 28°

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16

Ref	Price €
8115.3000.1M	NW WW
8115.3000.2M	NW WW
8115.3000.16	NW WW
8115.3000.29	NW WW
8115.3000.49	NW WW

built-up

8115.2730/.. - MARY SUZETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

Ø70xH130 mm 30°

Head Ø70xH80 mm

Materials

Aluminium 1M | 2M
Aluminium / Messing 216

Ref	Price €
8115.2730.1M	NW WW
8115.2730.2M	NW WW
8115.2730.216	NW WW

built-up



CEILING UP

TRACK



8127.7870/.. - MARY PETRUS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Lamp type

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M | 29 | 49

Messing

16 | 13M

Ref	Price €
8127.7870.1M	NW WW
8127.7870.2M	NW WW
8127.7870.16	NW WW
8127.7870.13M	NW WW
8127.7870.29	NW WW
8127.7870.49	NW WW

built-up
to combine with adaptor or on a profile

8127.7871/.. - MARY LUCAS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Lamp type

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref	Price €
8127.7871.1M	NW WW
8127.7871.2M	NW WW
8127.7871.16	NW WW
8127.7871.13M	NW WW

built-up
to combine with adaptor or on a profile

8127.7872/.. - MARY MARCUS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Lamp type

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø57xH195 mm

40°

Head Ø57xH125 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref	Price €
8127.7872.1M	NW WW
8127.7872.2M	NW WW
8127.7872.16	NW WW
8127.7872.13M	NW WW

built-up
to combine with adaptor or on a profile



8115.5003A/.. - MARY MAESTRO

~230V



suspension with adapter - round - fixed - without LED lamp

Lamptype

1x A60 E27 max. 10,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

8115.5003A.1M.TX1


8115.5003A.2M.TX2

Price €

built-up

8115.1842/.. - MARY MERO

~230V



suspension with adapter - round - fixed - tube 300mm

Lamptype

1x LED 700lm CRI92 9,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

8115.1842.1M.TX1

8115.1842.2M.TX2

Price €

built-up

8115.5043E/.. - MARY MOBY DECO

~230V



suspension with adapter - round - fixed - without LED lamp

Lamptype

1x A60 E27 max. 10,5W

230V

Dimensions

Ø54xH140 mm

Cable 1000 mm

Head Ø54xH85 mm

Materials

Aluminium

1M | 2M

Ref

8115.5043E.1M.TR.TX1

8115.5043E.2M.ST.TX2

Price €

built-up




4901/.. - MARY 3FASE DALI INSIDE

~230V



IP20

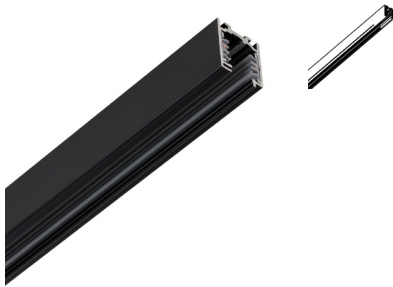

track

Dimensions

L1000xB31,4xH mm

Materials

Aluminium

1 | 2

Ref

4901.1

4901.2

Price €




You can shorten the rail yourself by sawing

4902/.. - MARY 3FASE DALI INSIDE

~230V



IP20

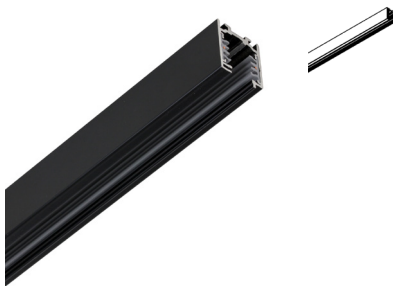

track

Dimensions

L2000xB31,4xH mm

Materials

Aluminium

1 | 2

Ref

4902.1

4902.2

Price €




built-up
extra transport cost - long profile - You can shorten the
rail yourself by sawing

4903/.. - MARY 3FASE DALI INSIDE

~230V



IP20

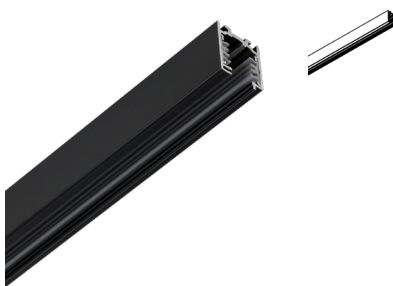

track

Dimensions

L3000xB31,4xH mm

Materials

Aluminium

1 | 2

Ref

4903.1

4903.2

Price €




built-up
extra transport cost - long profile - You can shorten the
rail yourself by sawing

4904/.. - MARY 3FASE DALI INSIDE

~230V



IP20

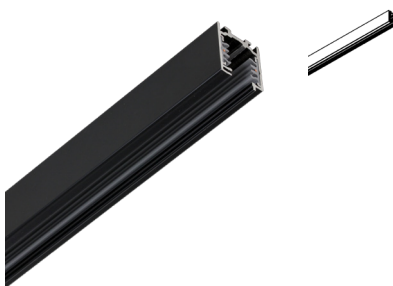

track

Dimensions

L4000xB31,4xH mm

Materials

Aluminium

1 | 2

Ref

4904.1

4904.2

Price €




built-up
extra transport cost - long profile - You can shorten the
rail yourself by sawing

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4913/.. - MARY 3FASE DALI INSIDE

IP20    



accessories for track systems - End cap

Dimensions

↔ L37,8xB31,4 mm

Materials

Aluminium

Ref

4913.1

4913.2

Price €

built-up

4908/.. - MARY 3FASE DALI INSIDE

IP20  



accessories for track systems - Ceiling clip black

Dimensions

↔ L40xB24,3xH13,5 mm

Materials

Aluminium

Ref

4908.2

Price €

4909/.. - MARY 3FASE DALI INSIDE

IP20  



accessories for track systems - Ceiling clip alu

Dimensions

↔ L40xB21,8xH15,7 mm

Materials

Aluminium

Ref

4909

Price €



4905/.. - MARY 3FASE DALI INSIDE

~230V



IP20



adapter - In-track adapter on/off

Dimensions

L90xB32 mm

Materials

Aluminium

Ref

4905.1

4905.2

Price €




1 | 2

4915/.. - MARY 3FASE DALI INSIDE

~230V



IP20

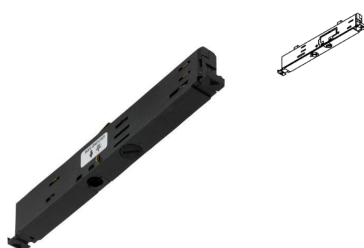

adapter - In-track adapter on/off with DALI contact

Dimensions

L180 mm

Materials

Aluminium

Ref

4915.1

4915.2


Price €



1 | 2

CEILING UP

TRACK

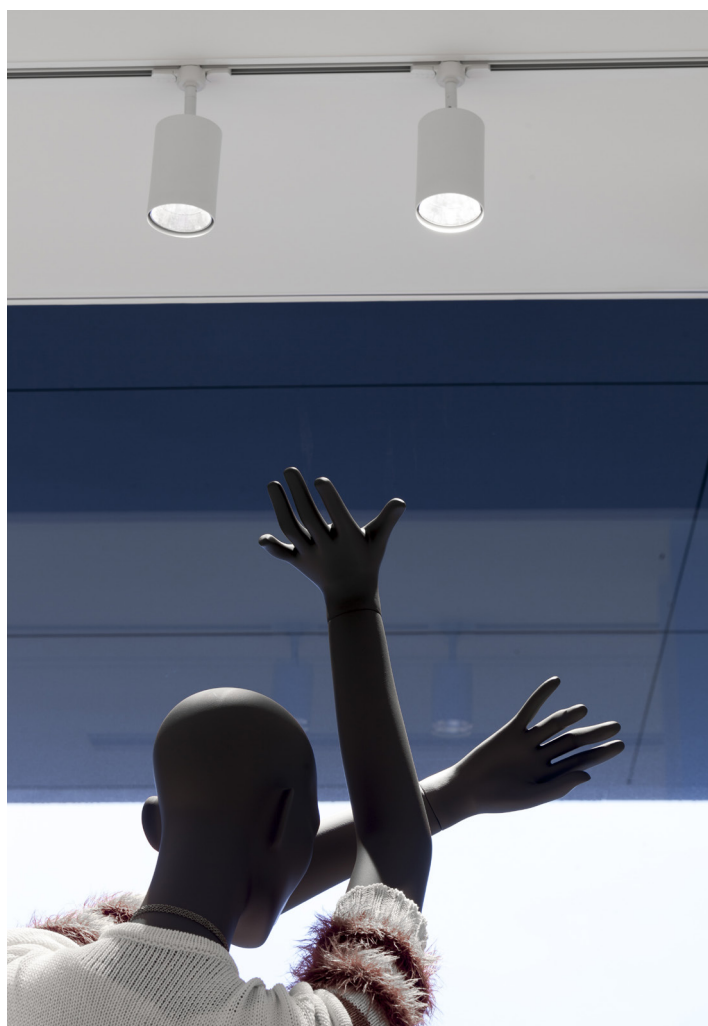

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4930.350/.. - MARY 3FASE DALI INSIDE

IP20  0.2500 



adapter - In-track adapter max. 14,7W 350mA DALI - voltage 5-42 VDC

Dimensions

↔ L350 mm

Materials

Aluminium

1 | 2

Ref	Price €
4930.350.1	
4930.350.2	

4930.500/.. - MARY 3FASE DALI INSIDE

IP20  



adapter - In-track adapter max. 21W 500mA DALI - voltage 5-42 VDC

Dimensions


↔ L350 mm

Materials

Aluminium

1 | 2

Ref	Price €
4930.500.1	
4930.500.2	

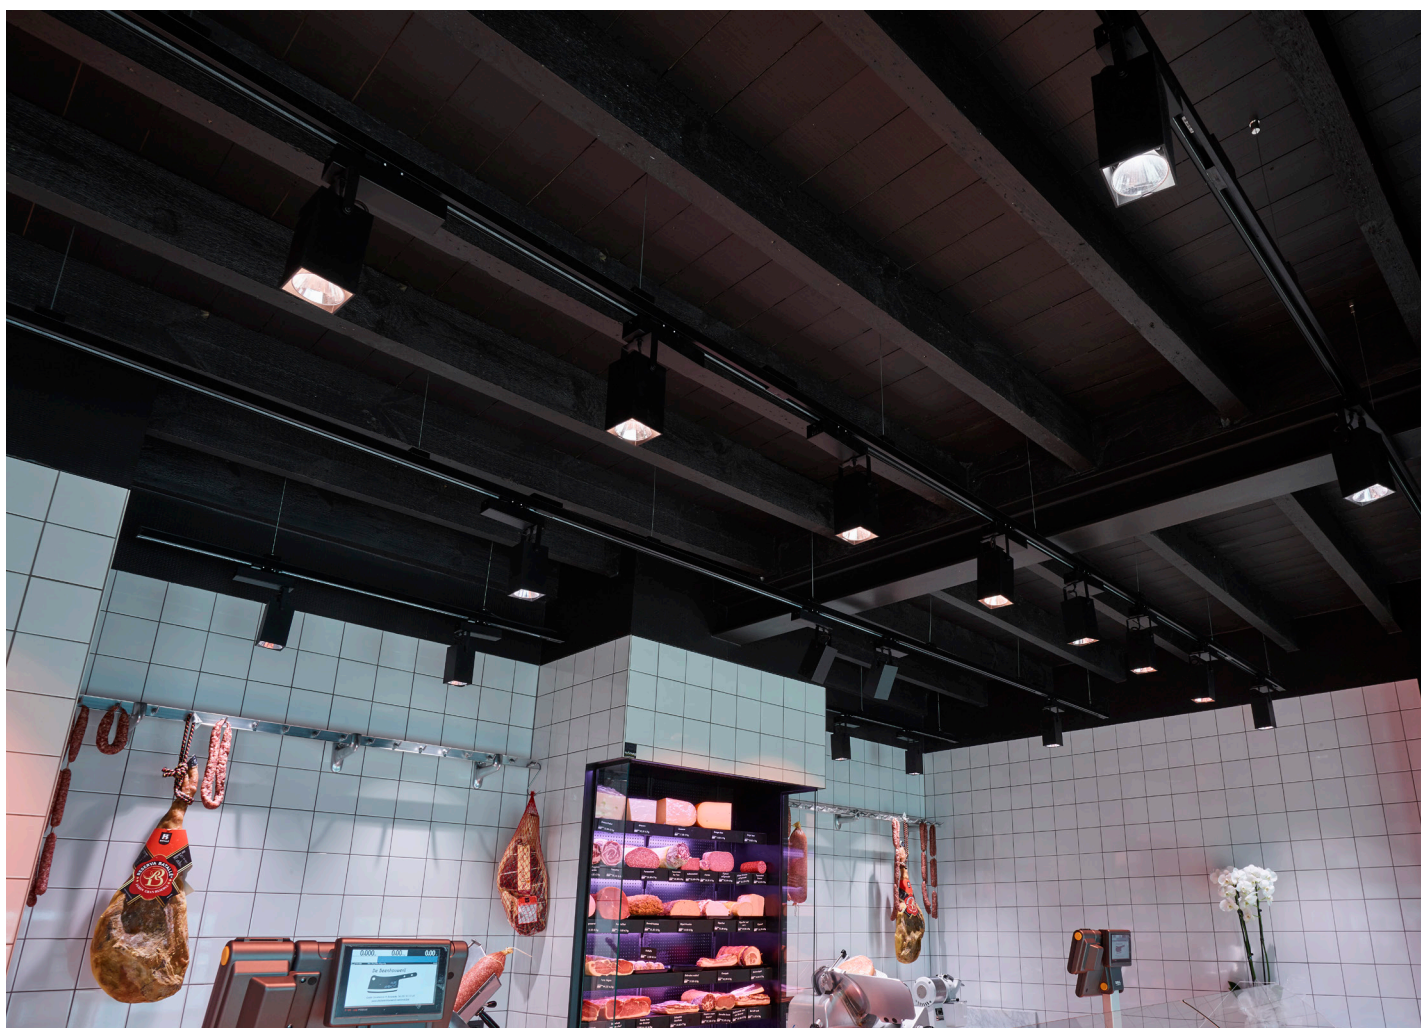

4931.250/.. - MARY 3FASE DALI INSIDE

IP20  



adapter - In-track adapter max. 10,7W 250mA on/off - voltage 5-43 VDC

Dimensions

↔ L320 mm

Materials

Aluminium 1 | 2

Ref	Price €
4931.250.1	
4931.250.2	

4931.350/.. - MARY 3FASE DALI INSIDE

IP20   



adapter - In-track adapter max. 15W 350mA on/off - voltage 5-43 VDC

Dimensions

↔ L320 mm

Materials

Aluminium 1 | 2

Ref	Price €
4931.350.1	
4931.350.2	

4931.500/.. - MARY 3FASE DALI INSIDE

IP20  



adapter - In-track adapter max. 21W 500mA on/off - voltage 5-43 VDC

Dimensions

↔ L320 mm

Materials

Aluminium 1 | 2

Ref	Price €
4931.500.1	
4931.500.2	

4932.350/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 15W 350mA DALI - voltage 5-42 VDC

Dimensions

↔ L250 mm

Materials

Aluminium 1 | 2

Ref	Price €
4932.350.1	
4932.350.2	

4932.500/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 21W 500mA DALI - voltage 5-42 VDC

Dimensions

↔ L250 mm

Materials

Aluminium 1 | 2

Ref	Price €
4932.500.1	
4932.500.2	

4932.700/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 30W 700mA DALI

Dimensions

↔ L250 mm

Materials

Aluminium 1 | 2

Ref	Price €
4932.700.1	
4932.700.2	

4911/.. - MARY 3FASE DALI INSIDE

IP20   



power supply for busbar system - End feed right

Dimensions

↔ L95 mm

Materials

Aluminium

1 | 2

Ref

4911.1

4911.2



Price €

4912/.. - MARY 3FASE DALI INSIDE

IP20   



power supply for busbar system - End feed left

Dimensions

↔ L95 mm

Materials

Aluminium

1 | 2

Ref

4912.1

4912.2




Price €





4914/.. - MARY 3FASE DALI INSIDE

IP20   CE



Connection joinings - Straight coupler

Materials

Aluminium

1 | 2

Ref

4914.1


4914.2

Price €



4919/.. - MARY 3FASE DALI INSIDE

IP20  CE

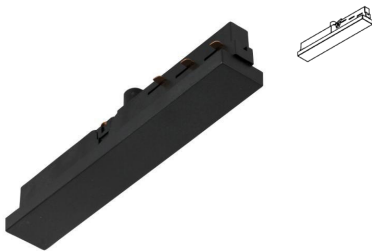

power supply for busbar system - Midfeed

Dimensions

↔ L203 mm

Materials

Aluminium

1 | 2

Ref

4919.1

4919.2

Price €



4907/.. - MARY 3FASE DALI INSIDE

IP20  CE



Connection joinings - I-connector with connection option for power supply

Dimensions

↔ L148 mm

Materials

Aluminium

1 | 2

Ref

4907.1

4907.2

Price €



CEILING UP

TRACK

4921/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - L-connector with connection option for power supply - grounding outside

Dimensions

↔ L89,7xB89,7 mm

Materials

Aluminium

Ref

4921.1

4921.2

Price €



1 | 2

4922/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - L-connector with connection option for power supply - grounding inside

Dimensions

↔ L89,7xB89,7 mm

Materials

Aluminium

Ref

4922.1

4922.2

Price €



1 | 2



4925/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - T-connector with connection option for power supply - grounding inside right

Dimensions

↔ L148xB78 mm

Materials

Aluminium 1 | 2

Ref **Price €**

4925.1



4925.2



4926/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - T-connector with connection option for power supply - grounding inside left

Dimensions

↔ L148xB78 mm

Materials

Aluminium 1 | 2

Ref **Price €**

4926.1



4926.2



4927/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - T-connector with connection option for power supply - grounding outside right

Dimensions

↔ L148xB78 mm

Materials

Aluminium 1 | 2

Ref **Price €**

4927.1



4927.2



4928/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - T-connector with connection option for power supply - grounding outside left

Dimensions

↔ L148xB78 mm

Materials

Aluminium 1 | 2

Ref **Price €**

4928.1



4928.2



4910/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - X-connector with connection option for power supply

Dimensions

↔ L148xB78 mm

Materials

Aluminium

Ref

4910.1

4910.2


Price €



1 | 2

4916/.. - MARY 3FASE DALI INSIDE

IP20  

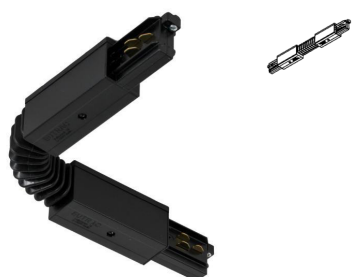

Connection joinings - Flex-connector

Dimensions

↔ L265 mm

Materials

Aluminium

Ref

4916.1

4916.2

Price €




1 | 2



4930.7870/.. - MARY PETRUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M | 29 | 49

Messing

16 | 13M

Ref

Price €

4930.7870.1M	NW WW
4930.7870.2M	NW WW
4930.7870.16	NW WW
4930.7870.13M	NW WW
4930.7870.29	NW WW
4930.7870.49	NW WW

built-up
to combine with adaptor or on a profile

4930.7871/.. - MARY LUCAS 3 FASE DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

Price €

4930.7871.1M	NW WW
4930.7871.2M	NW WW
4930.7871.16	NW WW
4930.7871.13M	NW WW

built-up
to combine with adaptor or on a profile

4930.7872/.. - MARY MARCUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø57xH195 mm

40°

Head Ø57xH125 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

Price €

4930.7872.1M	NW WW
4930.7872.2M	NW WW
4930.7872.16	NW WW
4930.7872.13M	NW WW

built-up
to combine with adaptor or on a profile

4931.7870/.. - MARY PETRUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M | 29 | 49

Messing

16 | 13M

Ref

4931.7870.1M
4931.7870.2M
4931.7870.16
4931.7870.13M
4931.7870.29
4931.7870.49


Price €

NW | WW
NW | WW
NW | WW
NW | WW
NW | WW
NW | WW

built-up
to combine with adaptor or on a profile

4931.7871/.. - MARY LUCAS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

4931.7871.1M
4931.7871.2M
4931.7871.16
4931.7871.13M


Price €

NW | WW
NW | WW
NW | WW
NW | WW

built-up
to combine with adaptor or on a profile

4931.7872/.. - MARY MARCUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø57xH195 mm

40°

Head Ø57xH125 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

4931.7872.1M
4931.7872.2M
4931.7872.16
4931.7872.13M

Price €

NW | WW
NW | WW
NW | WW
NW | WW

built-up
to combine with adaptor or on a profile




CEILING UP

TRACK

4932.7870/.. - MARY PETRUS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M | 29 | 49

Messing

16 | 13M

Ref

Price €

4932.7870.1M

NW | WW

4932.7870.2M

NW | WW

4932.7870.16

NW | WW

4932.7870.13M

NW | WW

4932.7870.29

NW | WW

4932.7870.49

NW | WW

*built-up
to combine with adaptor or on a profile*

4932.7871/.. - MARY LUCAS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø54xH145 mm

40°

Head Ø54xH80 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

Price €

4932.7871.1M

NW | WW

4932.7871.2M

NW | WW

4932.7871.16

NW | WW


4932.7871.13M

NW | WW

*built-up
to combine with adaptor or on a profile*

4932.7872/.. - MARY MARCUS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W

500mA

Dimensions

Ø57xH195 mm

40°

Head Ø57xH125 mm

Materials

Aluminium

1M | 2M

Messing

16 | 13M

Ref

Price €

4932.7872.1M

NW | WW

4932.7872.2M

NW | WW

4932.7872.16


NW | WW

4932.7872.13M

NW | WW

*built-up
to combine with adaptor or on a profile*


Coulours

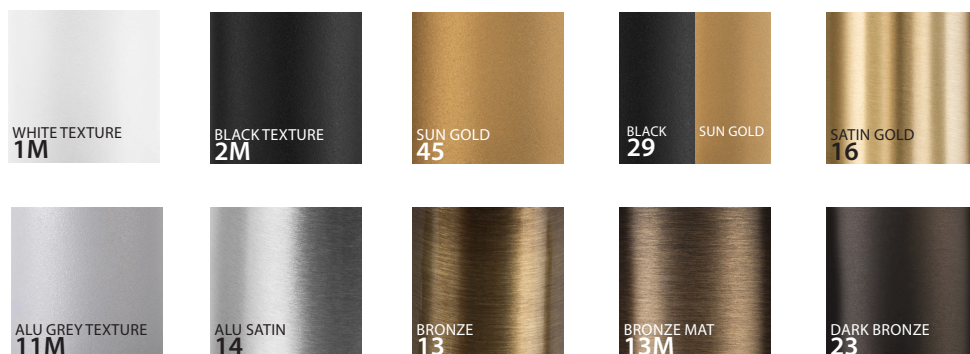

Andere kleuren op aanvraag - Autres couleurs sur demande - Andere Farben auf Anfrage
Other colours on request

CEILING UP

TRACK

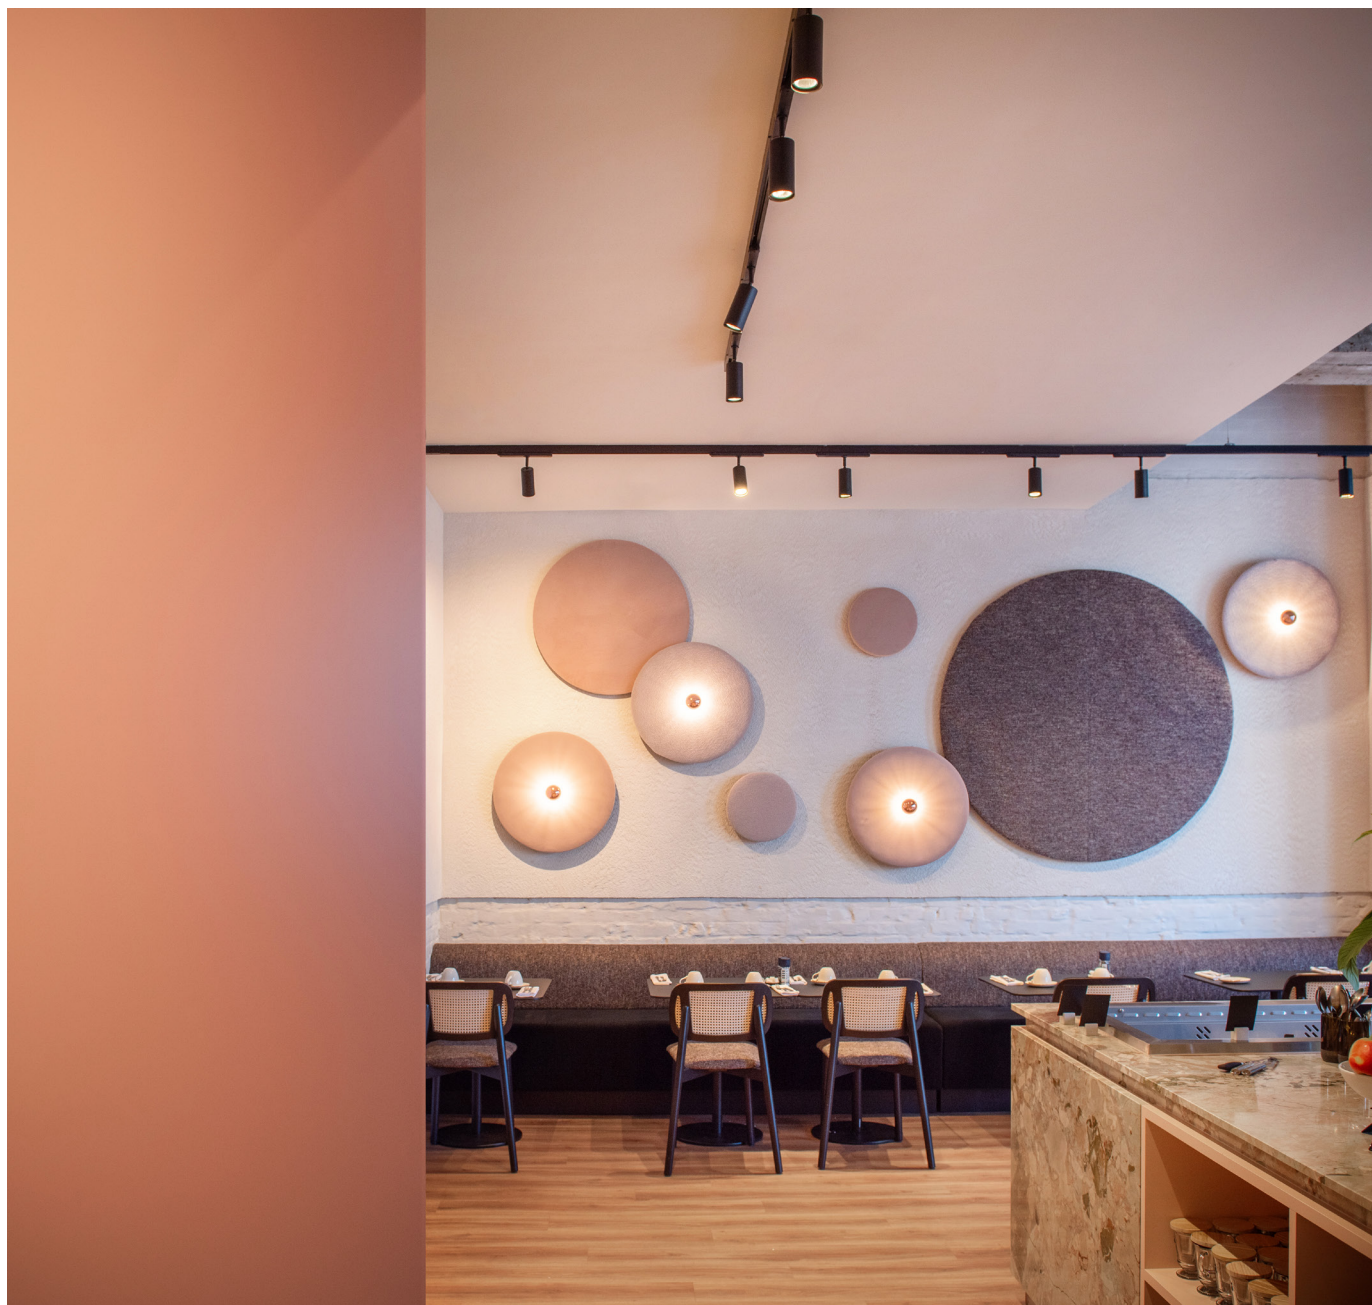



Delighted to help you

Groendreef 60, 9880 Aalter | T +32 9 374 19 51 | www.psmlighting.be

All our products are locally made in Aalter, Belgium (EU). Short delivery times.