



Pablo Nike Control box

Electrify your outdoor experience



psmighting

Delighted to help you



Pablo

T1941/.. - PABLO - INOX

~230V



IP55



Connecting pillar - with 1 power point NIKO, 1 cable gland and strain relief for tube or cable

Ref

Price €

T1941.32X

**Lamptype**

1x powerpoint .

230V

Dimensions

L102xB65xH542 mm

Materials

Inox

32X

*built-up
pin earthing
switch on demand*

T1942/.. - PABLO - INOX

~230V



IP55



Connecting pillar - with 2 power points NIKO, 1 cable gland and strain relief for tube or cable

Ref

Price €

T1942.32X

**Dimensions**

L102xB65xH617 mm

Materials

Inox

32X

*built-up
pin earthing
switch on demand*

T1943/.. - PABLO - INOX

~230V



Connecting pillar - with 1 power point NIKO, 2 cable glands and strain relief for tube or cables

Ref
Price €

T1943.32X

Dimensions

L102xB65xH542 mm

Materials

Inox

32X

*built-up
pin earthing
switch on demand*

T1943RA/.. - PABLO RANDAARDING INOX

~230V



Connecting pillar - with 1 power point NIKO, 2 cable glands and strain relief for tube or cables

Ref
Price €

T1943RA.32X

Dimensions

L102xB65xH542 mm

Materials

Inox

32X

*built-up
with side earthing
switch on demand*

T1944/.. - PABLO - INOX

~230V



Connecting pillar - with 2 power points NIKO, 2 cable glands and strain relief for tube or cables

Ref
Price €

T1944.32X

Dimensions

L102xB65xH617 mm

Materials

Inox

32X

*built-up
pin earthing
switch on demand*

T1945/.. - PABLO - INOX

~230V



Connecting pillar - with 3 power points NIKO, 2 cable glands and strain relief for tube or cables

Ref
Price €

T1945.32X

Dimensions

L102xB65xH687 mm

Materials

Inox


32X

*built-up
pin earthing
switch on demand*



T1946/.. - PABLO - INOX

~230V



Connecting pillar - with 2 power points NIKO, 1 cable gland and strain relief for tube or cable

Dimensions

↔ L 175xB65xH542 mm

Materials

Inox 32X

Ref

T1946.32X

Price €

*built-up
pin earthing
switch on demand*

T1947/.. - PABLO - INOX

~230V



Connecting pillar - with 2 power points NIKO, 2 cable glands and strain relief for tube or cables

Dimensions

↔ L 175xB65xH542 mm

Materials

Inox 32X

Ref


T1947.32X

Price €

*built-up
pin earthing
switch on demand*

T1948/.. - PABLO - INOX

~230V



Connecting pillar - with 3 power points NIKO, 2 cable glands and strain relief for tube or cables

Dimensions

↔ L 248xB65xH542 mm

Materials

Inox 32X

Ref

T1948.32X

Price €

*built-up
pin earthing
switch on demand*



T1953/.. - PABLO - INOX

~230V



IP55



Connecting pillar - with 1 power point NIKO, 2 cable glands and cover plate for cable protection

Dimensions

↔ L77xB65xH542 mm

Materials

Inox

Ref

T1953.32X

Price €



*built-up
pin earthing
switch on demand*

T1954/.. - PABLO PENAARDING - INOX

~230V



IP55



Connecting pillar - with 2 power points NIKO, 2 cable glands and cover plate for cable protection

Dimensions

↔ L77xB65xH612 mm

Materials

Inox

Ref

T1954.32X

Price €



*built-up
pin earthing
switch on demand*



T1954RA/.. - PABLO RANDAARDING - INOX

~230V



IP55



Connecting pillar - with 2 power points NIKO, 2 cable glands and cover plate for cable protection

Dimensions

L77xB65xH612 mm

Materials

Inox

32X

Ref

T1954RA.32X

**Price €***built-up
with side earthing
switch on demand***T1955/.. - PABLO - INOX**

~230V



IP55



Connecting pillar - with 3 power points NIKO, 2 cable glands and cover plate for cable protection

Dimensions

L77xB65xH687 mm

Materials

Inox

32X

Ref

T1955.32X

**Price €***built-up
pin earthing
switch on demand*

T1956/.. - PABLO - INOX

~230V



IP55



0,5 m

5,14



Connecting pillar - with 1 power point NIKO, 2 cable glands and cover plate for cable protection

Ref

Price €

T1956.32X

Dimensions

L77xB65xH288 mm base plate L120xB120 mm

Materials

Inox 32X



built-up
pin earthing
switch on demand

T1957/.. - PABLO - INOX

~230V



IP55



1,4500

0,5 m

5,14



Connecting pillar - with 2 power points NIKO, 2 cable glands and cover plate for cable protection

Ref

Price €

T1957.32X

Dimensions

L77xB65xH358 mm base plate L120xB120 mm

Materials

Inox 32X



built-up
pin earthing
switch on demand

T1958/.. - PABLO - INOX

~230V



IP55



1,9000

0,5 m

5,14



Connecting pillar - with 3 power points NIKO, 2 cable glands and cover plate for cable protection

Ref

Price €

T1958.32X

Dimensions

L77xB65xH433 mm base plate L120xB120 mm

Materials

Inox 32X



built-up
pin earthing
switch on demand

T1959/.. - PABLO SPIKE


0,6000



spike

Ref

Price €

Dimensions

L100xB80xH250 mm



built-in





Nike

T351/.. - NIKE PENAARDING

~230V



IP55



Connecting pillar - with 1 power point NIKO

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 31MX | 32X | 700 | 64X

Ref

T351.31MX

T351.32X

T351.700

T351.64X

Price €



*built-up
pin earthing
switch on demand*

T351RA/.. - NIKE RANDAARDING

~230V



IP55



Connecting pillar - with 1 power point NIKO

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 31MX | 32X | 700 | 64X

Ref

T351RA.31MX

T351RA.32X

T351RA.64X

T351RA.700

Price €



*built-up
side earthing
switch on demand*

T351MO/.. - NIKE MODULAIR

~230V



IP55



Connecting pillar - modular

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 31MX | 32X | 700 | 64X

Ref

T351MO.31MX

T351MO.32X

T351MO.64X

T351MO.700


Price €



built-up

T351SP/.. - NIKE PENAARDING

~230V



Connecting pillar - with 1 power point NIKO

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 32X | 700 | 44X | 64X | 46X | 21X

Ref
Price €

T351SP.32X	●
T351SP.700	●
T351SP.44X	●
T351SP.64X	●
T351SP.46X	●
T351SP.21X	●



built-up
pin earthing
switch on demand

T351RASP/.. - NIKE RANDAARDING

~230V



Connecting pillar - with 1 power point NIKO

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 31MX | 32X | 700 | 64X

Ref
Price €

T351RASP.31MX	●
T351RASP.32X	●
T351RASP.64X	●
T351RASP.700	●



built-up
side earthing
switch on demand

T351MOSP/.. - NIKE MODULAIR

~230V



Connecting pillar - modular

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 31MX | 32X | 700 | 64X

Ref
Price €

T351MOSP.31MX	●
T351MOSP.32X	●
T351MOSP.64X	●
T351MOSP.700	●



built-up

T352/.. - NIKE PENAARDING

~230V



IP55



Connecting pillar - with 2 power points NIKO

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Cortenstaal

54

Inox

31MX | 32X | 700 | 44X | 64X | 53X |
46X | 21X | 71X

Ref
Price €

T352.31MX

T352.32X

T352.700

T352.44X

T352.64X

T352.53X

T352.46X

T352.21X

T352.71X

T352.54

built-up
pin earthing
switch on demand

T352RA/.. - NIKE RANDAARDING

~230V



IP55



Connecting pillar - with 2 power points NIKO

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X | 71X

Ref
Price €

T352RA.71X

T352RA.31MX

T352RA.32X

T352RA.64X

T352RA.700

built-up
side earthing
switch on demand

T352MO/.. - NIKE MODULAIR

~230V



IP55



Connecting pillar - modular

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref
Price €

T352MO.31MX

T352MO.32X

T352MO.64X

T352MO.700

built-up

T352SP/.. - NIKE PENAARDING

~230V



IP55



*built-up
pin earthing
switch on demand*

Connecting pillar - with 2 power points NIKO

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T352SP.31MX

T352SP.32X

T352SP.700

T352SP.64X

Price €
T352RASP/.. - NIKE RANDAARDING

~230V



IP55



*built-up
side earthing
switch on demand*

Connecting pillar - with 2 power points NIKO

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T352RASP.31MX

T352RASP.32X

T352RASP.700

T352RASP.64X

Price €
T352MOSP/.. - NIKE MODULAIR

~230V



IP55



built-up

Connecting pillar - modular

Dimensions

L84xB55xH345 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T352MOSP.31MX

T352MOSP.32X

T352MOSP.64X

T352MOSP.700

Price €



T353/.. - NIKE PENAARDING

~230V



IP55



Connecting pillar - with 3 power points NIKO

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T353.31MX

T353.32X

T353.64X

T353.700

Price €

*built-up
pin earthing
switch on demand*

T353RA/.. - NIKE RANDAARDING

~230V



IP55



Connecting pillar - with 3 power points NIKO

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T353RA.31MX

T353RA.32X

T353RA.64X

T353RA.700

Price €

*built-up
side earthing
switch on demand*

T353MO/.. - NIKE MODULAIR

~230V



IP55



Connecting pillar - modular

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X

Ref

T353MO.31MX

T353MO.32X

T353MO.64X

T353MO.700

Price €

built-up

T353SP/.. - NIKE PENAARDING

~230V



IP55



Connecting pillar - with 3 power points NIKO

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X | 71X

Ref

T353SP.71X

T353SP.31MX

T353SP.32X

T353SP.64X

T353SP.700


Price €

built-up
pin earthing
switch on demand

T353RASP/.. - NIKE RANDAARDING

~230V



IP55



Connecting pillar - with 3 power points NIKO

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X | 71X

Ref

T353RASP.71X

T353RASP.31MX

T353RASP.32X

T353RASP.64X

T353RASP.700


Price €

built-up
side earthing
switch on demand

T353MOSP/.. - NIKE MODULAIR

~230V



IP55



Connecting pillar - modular

Dimensions

L84xB68xH422 mm

L150xB150 mm

Materials

Inox

31MX | 32X | 700 | 64X | 71X

Ref

T353MOSP.71X

T353MOSP.31MX

T353MOSP.32X

T353MOSP.64X

T353MOSP.700


Price €

built-up



T397/.. - NIKE PENAARDING

~230V



Connecting pillar - with 1 power point HAGER

Dimensions

L84xB55xH240 mm L150xB150 mm

Materials

Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref

Price €

T397.5	●
T397.5B	●
T397.21X	●
T397.32X	●
T397.34X	●
T397.37X	●
T397.64X	●

built-up
pin earthing
switch on demand

T397SP/.. - NIKE PENAARDING

~230V



Connecting pillar - with 1 power point HAGER

Dimensions

L84xB55xH240 mm

Materials

Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref

Price €



T397SP.5	●
T397SP.5B	●
T397SP.21X	●
T397SP.32X	●
T397SP.34X	●
T397SP.37X	●
T397SP.64X	●

built-up
pin earthing
switch on demand



T400/.. - NIKE PENAARDING

~230V



Connecting pillar - with 2 power points HAGER

Dimensions

L84xB55xH345 mm L150xB150 mm

Materials

Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref	Price €
T400.5	
T400.5B	
T400.21X	
T400.32X	
T400.34X	
T400.37X	
T400.64X	

*built-up
pin earthing
switch on demand*

T400SP/.. - NIKE PENAARDING

~230V



Connecting pillar - with 2 power points HAGER

Dimensions

L84xB55xH345 mm

Materials


Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref	Price €
T400SP.5	
T400SP.5B	
T400SP.21X	
T400SP.32X	
T400SP.34X	
T400SP.37X	
T400SP.64X	

*built-up
pin earthing
switch on demand*

T398/.. - NIKE PENAARDING

~230V



Connecting pillar - with 6 power points HAGER

Dimensions

L84xB55xH650 mm L150xB150 mm

Materials


Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref	Price €
T398.5	
T398.5B	
T398.21X	
T398.32X	
T398.34X	
T398.37X	
T398.64X	

*built-up
pin earthing
switches on demand*

T399/.. - NIKE PENAARDING

~230V



Connecting pillar - with 4 power points HAGER

Dimensions

L84xB55xH520 mm L150xB150 mm

Materials

Inox 32X | 37X | 64X | 21X | 34X
Inox 316 5 | 5B

Ref	Price €
T399.5	
T399.5B	
T399.21X	
T399.32X	
T399.34X	
T399.37X	
T399.64X	

*built-up
pin earthing
switches on demand*


Standard colours outdoor



Inox coating colours outdoor



Specials colours outdoor



FLOOR UP



Control box

T1185/.. - CONTROL BOX

IP44    CE

Connecting pillar - empty housing - space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X

Ref**Price €**

T1185.32X



T1185.32X.37X

*built-up
mounting on concrete or tiles*

T1185SP/.. - CONTROL BOX

IP44    CE

Connecting pillar - empty housing - space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 33MX

Ref**Price €**

T1185SP.32X



T1185SP.32X.37X



T1185SP.33MX



T1185SP.37X


*built-up
+ set spikes*

CONTROLBOX VOOR TUINAANSLUITINGEN

Ledige box OF met stopcontacten OF met stopcontacten en draadloze sturing

VOORDELEN VAN DE CONTROLBOX

- Behuizing in inox (afmetingen 300x310x145 mm).
- Twee ingangen voorzien voor het binnentrekken van Ø50 mm-flexibel.
- Reserve ingangen van Ø18mm.
- Eén voeding vanuit uw woning nodig.
- Verdeling vanuit de Controlbox naar de verschillende circuits.
- Uitsparing van bekabeling en delfwerk.
- Geen leidingen en kabels nodig voor bediening (draadloos).
- Uitbreiding van zenders is mogelijk.
- Iedere kring is instelbaar.
- Defecten zijn gemakkelijk op te sporen.
- Alle elektrische verbindingen zijn bovengronds.

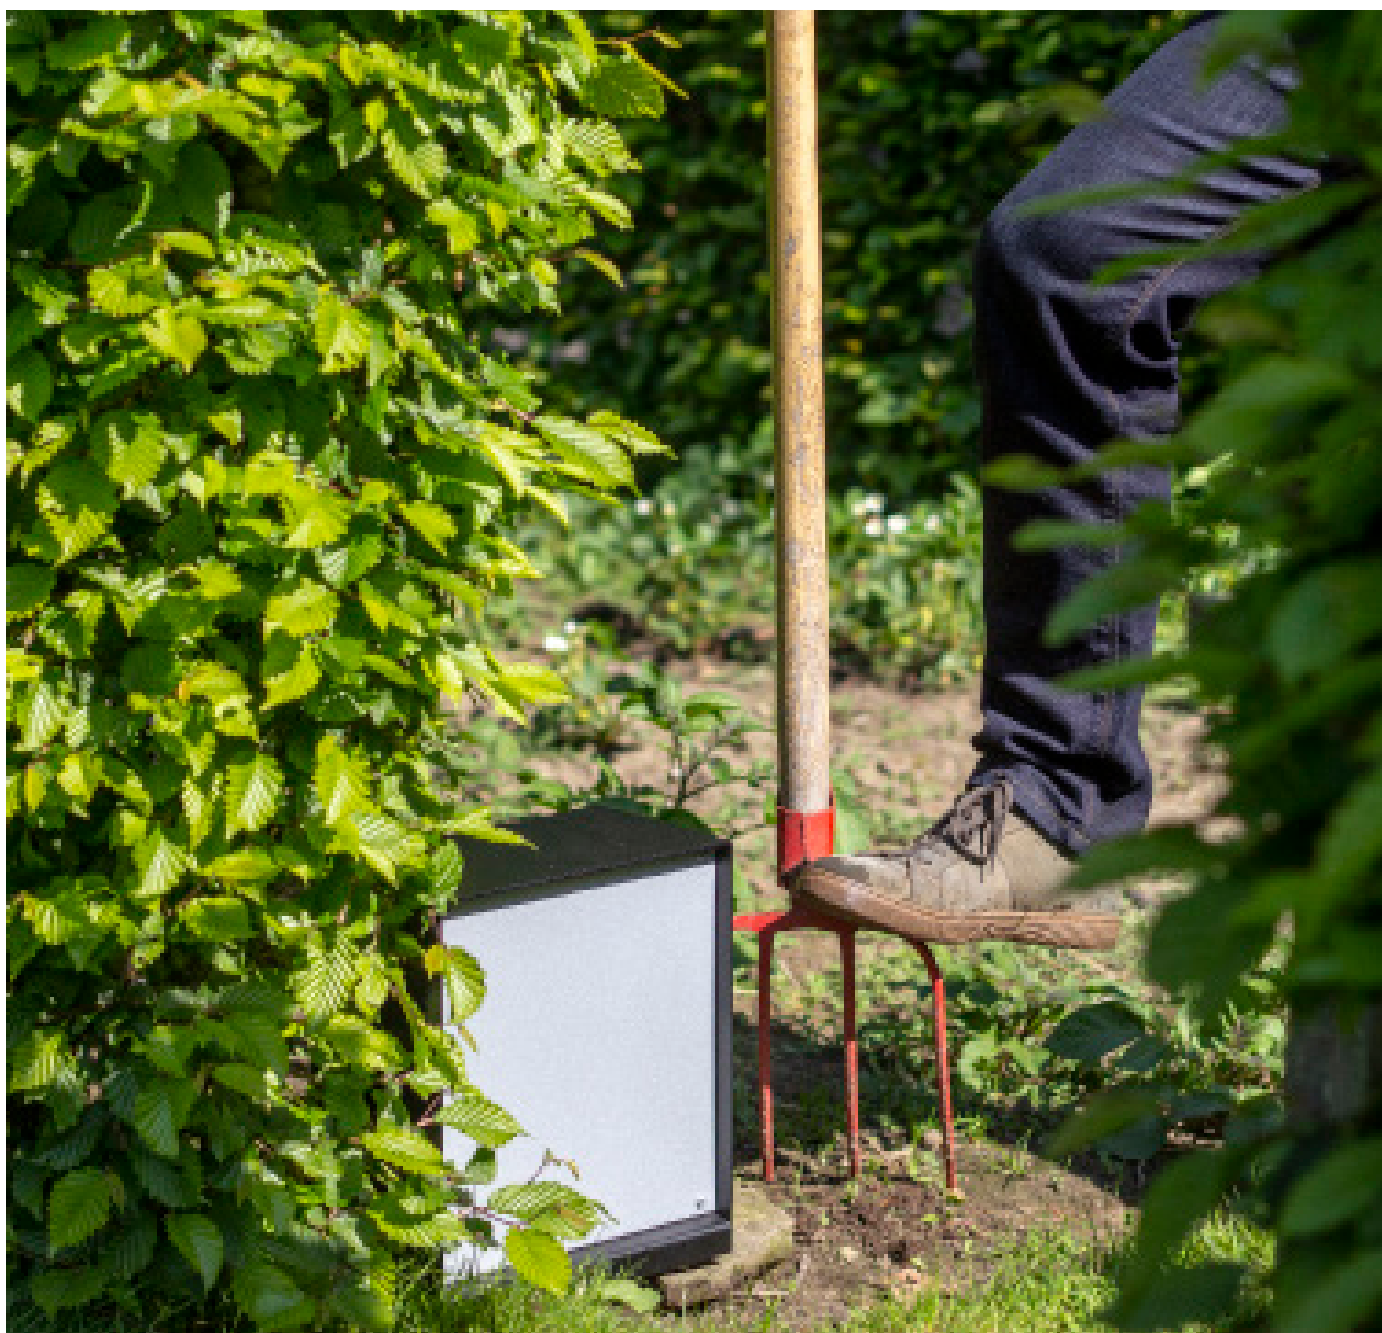

T1186/.. - CONTROL BOX

~230V



IP44



2.6400

5.14


Connecting pillar - Housing with 2 black powerpoints NIKO
- space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X

Ref

T1186.32X

Price €

built-up
mounting on concrete or tiles

T1186SP/.. - CONTROL BOX

~230V



IP44



1.6900

5.14


Connecting pillar - Housing with 2 black powerpoints NIKO
- space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X

Ref

T1186SP.32X

Price €

built-up
+ set spikes

T1187/.. - CONTROL BOX

~230V



IP44



2.3850

5.14


Connecting pillar - housing with 2 powerpoints HAGER -
space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 64X | 33MX

Ref

T1187.32X

T1187.33MX

T1187.37X

T1187.64X

Price €

built-up
mounting on concrete or tiles

T1187SP/.. - CONTROL BOX

~230V



IP44



2.1000

5.14


Connecting pillar - housing with 2 powerpoints HAGER -
space for all junction boxes

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 64X | 33MX

Ref

T1187SP.32X

T1187SP.33MX

T1187SP.37X

T1187SP.64X

Price €

built-up
+ set spikes



T1188/.. - CONTROL BOX

~230V



IP44



2.3800

5.14


Connecting pillar - housing with 2 black powerpoints NIKO
- receiver - wireless transmitter - wall transmitter

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 33MX

Ref
Price €

T1188.32X



T1188.33MX



T1188.37X


built-up
mounting on concrete or tiles

T1188SP/.. - CONTROL BOX

~230V



IP44



1.4400

5.14


Connecting pillar - housing with 2 black powerpoints NIKO
- receiver - wireless transmitter - wall transmitter

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 33MX

Ref
Price €

T1188SP.32X



T1188SP.33MX



T1188SP.37X


built-up
+ set spikes

T1189/.. - CONTROL BOX

~230V



IP44



1.5400

5.14


Connecting pillar - housing with 2 powerpoints HAGER -
receiver - wireless transmitter - wall transmitter

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 33MX

Ref
Price €

T1189.32X



T1189.32X.37X



T1189.33MX



T1189.37X


built-up
mounting on concrete or tiles

T1189SP/.. - CONTROL BOX

~230V



IP44



2.3100

5.14


Connecting pillar - housing with 2 powerpoints HAGER -
receiver - wireless transmitter - wall transmitter

Dimensions

B310xH300xD145 mm

Materials

Inox

32X | 37X | 64X | 33MX

Ref
Price €

T1189SP.32X



T1189SP.32X.37X



T1189SP.33MX



T1189SP.37X



T1189SP.64X


built-up
+ set spikes

T1643/.. - CONTROL BOX SPIKE

IP   



spike

Dimensions

↔ L125xB40xH202 mm

Ref

T1643

Price €

built-in

T1197/.. - CONTROL BOX

~230V

 IP54   



accessories - receiver - 4 channels

Dimensions

↔ L200xB154xD79 mm

T1198/.. - CONTROL BOX

IP    



accessories - wall transmitter

Dimensions

↔ L85xB85xH10 mm

T1199/.. - CONTROL BOX

IP    



accessories - hand transmitter

Dimensions

↔ L60xB30xH10 mm



BESCHRIJVING VAN DE CONTROLBOX

De Controlbox is een gestileerd voeding- en stuursysteem met twee stopcontacten, een ontvanger en draadloze sturing voor 4 elektrische circuits voor in de tuin (IP 54).

Inbegrepen in de Controlbox zit:

- Een inox-behuizing (afmetingen H300xB310XD145mm).
- Een draadloze ontvanger (Art.nr. T1197)
- Een 4-kanaalwandzender (Art.nr. T1198)
- Een 4-kanaalhandzender (Art.nr. T1199)

VOORBEELD: Controlbox met stopcontacten en draadloze sturing

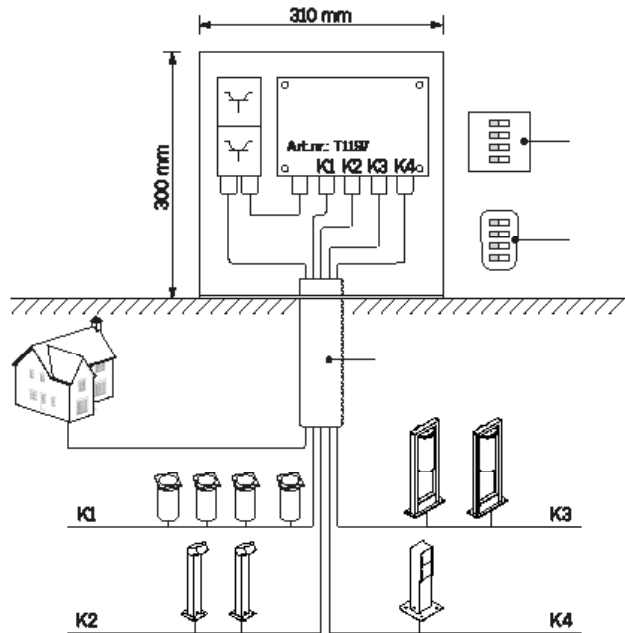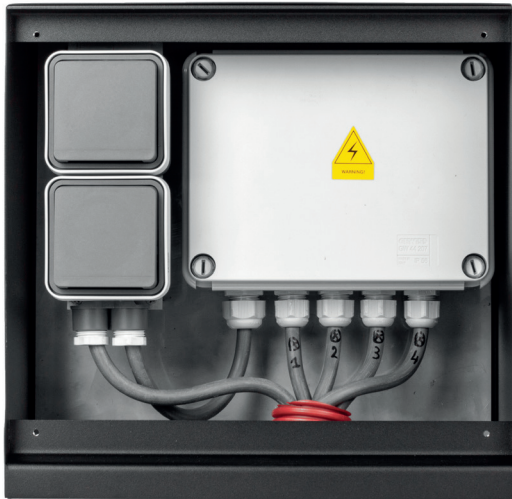

T1222/.. - CONTROL BOX

~230V



IP44



Connecting pillar - Connection box with two power points and junction box for draw-off tap - water supply included

Dimensions

↔ B400xH400xD150 mm

Materials

Inox 32X | 37X | 33MX

Ref **Price €**

T1222.32X	●
T1222.32X.37X	● ●
T1222.33MX	●
T1222.37X	●

built-up
mounting on concrete or tiles
water connection M24

T1223/.. - CONTROL BOX

~230V



IP44



Connecting pillar - Connection box with two power points and junction box for draw-off tap, water supply include. With electrical control unit for 4 power relays + fixed control panel + remote control.

Dimensions

↔ B400xH400xD150 mm

Materials

Inox 32X | 37X | 33MX

Ref **Price €**

T1223.32X	●
T1223.32X.37X	● ●
T1223.37X	●
T1223.33MX	●

built-up
mounting on concrete or tiles
water connection M24

T1225/.. - CONTROL BOX

~230V



IP44



Connecting pillar - Connection box with two power points and junction box for draw-off tap - water supply and outlet included

Dimensions

↔ B400xH400xD150 mm

Materials

Inox 32X | 37X | 33MX

Ref **Price €**

T1225.32X	●
T1225.32X.37X	● ●
T1225.33MX	●
T1225.37X	●

built-up
mounting on concrete or tiles
water connection M24

T1228/.. - CONTROL BOX

~230V



IP44



Connecting pillar

Dimensions

↔ B400xH400xD150 mm

Materials

Inox 32X | 37X | 33MX

Ref **Price €**

T1228.32X	●
T1228.32X.37X	● ●
T1228.33MX	●
T1228.37X	●

built-up
mounting on concrete or tiles
water connection M24



OUTDOOR | Floor UP | CONTROL BOX

T1565/.. - CONTROL BOX

~230V



IP44



Connecting pillar - Connection box with two power points and junction box for draw-off tap - water supply included

Dimensions

↔ L 140xB 140xH 500 mm Base L 200xB 200 mm

Materials

Inox 32X | 37X | 64X | 33MX

Ref

T1565.32X

T1565.37X

T1565.64X

T1565.33MX

Price €

built-up
mounting on concrete or tiles
water connection M24

T1570/.. - CONTROL BOX SPIKE

IP



spike

Dimensions

↔ L 200xB 200xH 440 mm

Ref

T1570

Price €

built-in

T1596/.. - CONTROL BOX

IP44



Connecting pillar - Connection box with junction box for draw-off tap - water supply included

Dimensions

↔ L 140xB 75xH 500 mm Base L 150xB 150 mm

Materials

Inox 32X | 37X | 64X | 33MX

Ref

T1596.32X

T1596.33MX

T1596.37X

T1596.64X

Price €

built-up
mounting on concrete or tiles
water connection M24

T1597/.. - CONTROL BOX SPIKE

IP



spike

Dimensions

↔ L 150xB 150xH 440 mm

Ref

T1597

Price €

built-in





100% Belgian Quality

PSM Lighting is a Belgian family business. The development, production, and finishing of our lighting all take place in our own workshop. This ensures that you enjoy a thoroughly Belgian product.



psmlighting

Delighted to help you